




Introducing the **Easy Series**

Essential automation & control products

When just enough is just right!

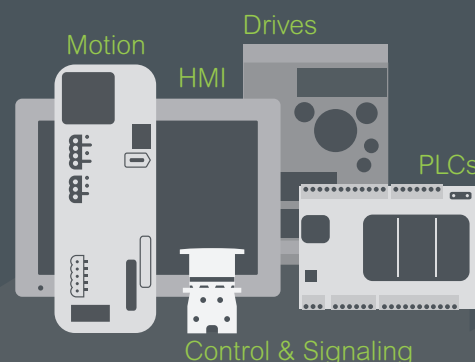

Easy Harmony XA2

Plastic pushbuttons, switches and pilot lights

Control and signaling units Ø 22



Harmony

Discover Harmony

Advanced operator interface and industrial relays

Harmony operator interface and industrial relays enhance operational efficiency and equipment availability across industrial and building applications. Harmony includes intelligent connected products and edge terminals that visualize, gather and process data, enabling informed operator decisions

Explore our offer

- Harmony Push Buttons and Switches
- Harmony HMI Operator Terminals, IPC and EdgeBox
- Harmony Signaling Devices
- Harmony Electrical Relays
- Harmony Safety


Quick access to product information

Get technical information about your product

References

Modicon TM3
I/O expansion modules for Modicon controllers
Analog I/O modules


References	Modicon TM3 analog input modules	Modicon TM3 analog output modules
2 voltage analog inputs	AI 2x12-bit 0...10VDC 0...20mA, 0...25mA	AO 2x12-bit 0...10VDC 0...20mA, 0...25mA
4 voltage analog inputs	AI 4x12-bit 0...10VDC 0...20mA, 0...25mA	AO 4x12-bit 0...10VDC 0...20mA, 0...25mA
4 voltage analog inputs or temperature inputs	AI 4x12-bit 0...10VDC 0...20mA, 0...25mA or -50...150°C -20...125°C -50...150°C -20...125°C	AO 4x12-bit 0...10VDC 0...20mA, 0...25mA or -50...150°C -20...125°C -50...150°C -20...125°C
4 differential temperature inputs	AI 4x12-bit 0...10VDC 0...20mA, 0...25mA or -50...150°C -20...125°C -50...150°C -20...125°C	AO 4x12-bit 0...10VDC 0...20mA, 0...25mA or -50...150°C -20...125°C -50...150°C -20...125°C

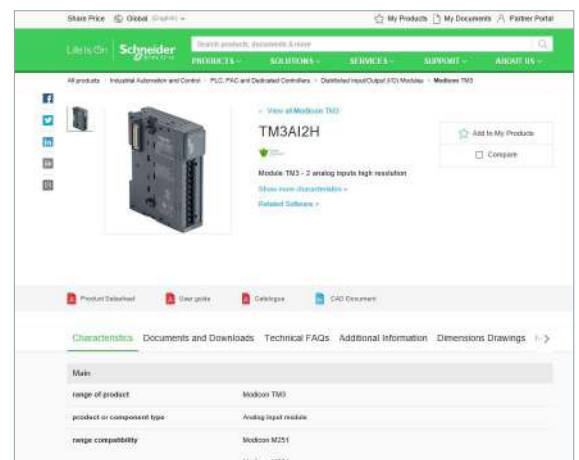


Each commercial reference presented in a catalog contains a hyperlink. Click on it to obtain the technical information of the product:

- Characteristics, Dimensions and drawings, Mounting and clearance, Connections and schemas, Performance curves
- Product image, Instruction sheet, User guide, Product certifications, End of life manual

Find your catalog

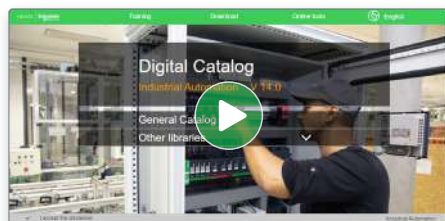

- > With just 3 clicks, you can access the Industrial Automation and Control catalogs, in both English and French
- > Consult digital automation catalogs at [Digi-Cat Online](#)

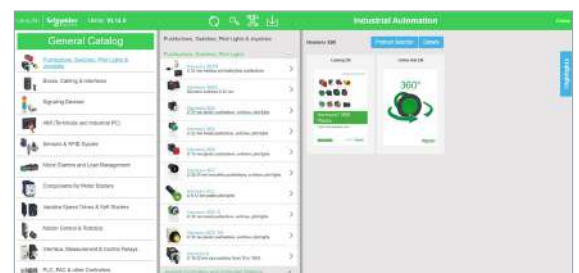


- Up-to-date catalogs
- Embedded product selectors, 360° pictures
- Optimized search by commercial references

Select your training



- > Find the right [Training](#) for your needs on our Global website
- > Locate the training center with the selector tool, using this [link](#)

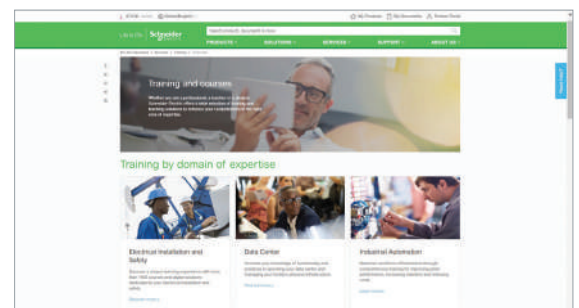

General contents

Harmony Easy XA2

■ General presentation.....	page 2
-----------------------------	--------

<i>Selection guide</i>	<i>page 4</i>
------------------------------	---------------

■ General

□ Presentation	page 8
----------------------	--------

□ Description	page 9
---------------------	--------

■ References

□ Spring return pushbuttons	page 12
-----------------------------------	---------

□ Mushroom head pushbuttons, spring return	page 12
--	---------

□ Pushbuttons, push-push	page 12
--------------------------------	---------

□ Double-headed pushbuttons, spring return.....	page 13
---	---------

□ Emergency switching off pushbuttons, push-pull and turn to release.....	page 13
--	---------

□ Selector switches, with standard handle or with long handle.....	page 14
--	---------

□ Key switches.....	page 14
---------------------	---------

□ Illuminated pushbuttons, flush push with integral LED	page 15
---	---------

□ Bulbs and associated accessories for illuminated pushbuttons	page 16
--	---------

□ Contact functions for all XA2 pushbuttons and switches	page 16
--	---------

□ Pilot lights	page 17
----------------------	---------

□ Indicators	page 18
--------------------	---------

□ Empty control stations	page 19
--------------------------------	---------

□ Product reference index.....	page 20
--------------------------------	---------

Easy Harmony XA2:

- modular, plastic pushbuttons and switches with metallic-look ring,
- complete, plastic pilot lights with integral LED

Fit for purpose

All the products composing the Easy Harmony XA2 range have been designed to be used in numerous control and signaling applications:

- > customers can easily select the key functions for standard applications
- > their diameter, Ø 22 mm / 0.866 in. makes them suitable for standard OEM and panel builder applications.
- > with plastic material, they provide a solution for industrial applications demanding a high resistance to chemical agents.

Ease and comfort of choice


The range is available in the form of complete units. It involves:

- > modular, plastic pushbuttons and switches with metallic-look ring
The modular design allows flexible and simple setup for complete products: the right product can be chosen among various types of heads and 2 types of functions are proposed (contact and signaling)
- > complete pilot lights, provided with integral LED.

All products are fitted with screw clamp terminals allowing fast and easy connection.

Contact functions

- Pushbuttons with spring return and push-push (marked or unmarked)
- Selector switches and key switches, 2 or 3 positions
- Emergency switching off pushbuttons with push-pull and turn to release
- Double-headed pushbuttons with spring return



Contact and signaling functions

- Illuminated pushbuttons with integral LED, spring return and flush push
- Illuminated double-headed pushbuttons with integral LED, spring return



Signaling functions

- Pilot lights with integral LED
- Indicators with integral LED



Groomed ergonomics

- > Metallic-look ring on pushbuttons and switches gives a modern look
- > Ergonomic curve on the selector switches allows flexible operation



Metallic-look ring



Ergonomic curve




Pushbuttons and switches with metallic-look ring design


Easy installation

- > Installation of pushbuttons is simple and easy
- > Mounting by single nut to the control panel
- > Anti-rotation plate prevents the pushbutton head from rotation

- Single lock ring for mounting on control panel



- Clip-together component system for head, body, contacts, and LED light blocks



Proven robustness

- > Conforming to most demanding international standards and approvals
- > Tested and certified performance
- > Excellent resistance to mechanical shock and vibration
- > Supports extended temperature range from – 40° C to + 70° C




Helps customer to
improve the reliability



Service and availability

- > Supported by the service of Schneider Electric
- > Wide availability throughout an extensive distribution network

+ Up to IP 65 degree of protection

Control and signaling units Ø 22
Easy Harmony XA2, plastic
Pushbuttons, switches and pilot lights

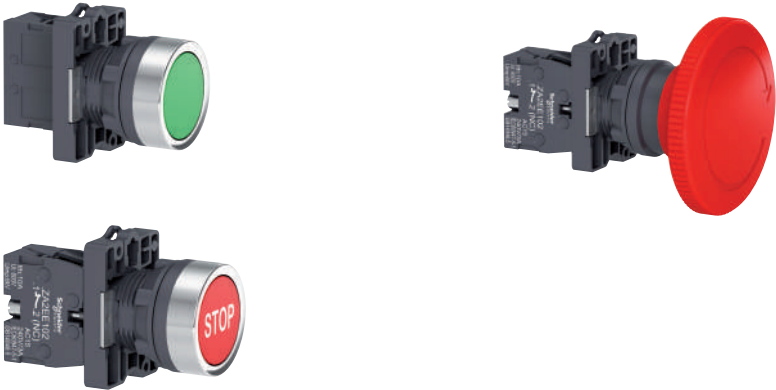Type of products		Contact functions
		PushbuttonsEmergency switching off pushbuttons
		
Description of range		■ Pushbuttons, spring return: flush push, mushroom head, and push-push■ Emergency switching off pushbuttons: turn to release and push-pull
Features	Products	Complete units
	Shape of head	Circular
Drilling or cut-out for mounting		Ø 22 mm/0.866 in.
Degree of protection		IP 65 conforming to standard IEC 60529
International standards		IEC 60947-5-1, EN 60947-5-1, GB/T 14048.1-93, GB/14048.5-93
Product certification		CCC, EAC, CÉ
Cabling		Screw clamp terminal connections
Mounting	Panel thickness	Ø 1 to 6 mm/ 0.04 to 0.24 in.
	Type references	XA2EA●●/EA●●●●/EC●●/EH0●●XA2ET●●/ES●●●
Pages		1213

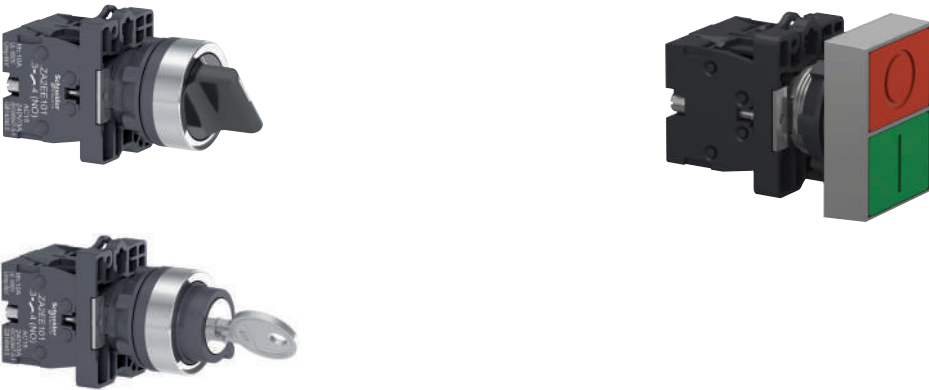Contact functions	
Selector and key switches	Double-headed pushbuttons
	
■ Selector switches, 2 or 3-position: standard or long handle■ Key switches	■ Double-headed pushbuttons, spring return
Complete units	
Circular	Rectangular
Ø 22 mm/0.866 in.	
IP 54 conforming to standard IEC 60529 Selector switches: IP 65 Key switches: IP 54	IP 40 conforming to standard IEC 60529
IEC 60947-5-1, EN 60947-5-1, GB/T 14048.1-93, GB/14048.5-93	
CCC, EAC, CÉ	CCC, CÉ, and EAC
Screw clamp terminal connections	
Ø 1 to 6 mm/ 0.04 to 0.24 in.	
XA2ED●●/EJ●●/EG●●	XA2EA7A3415
14	13

Control and signaling units Ø 22
Easy Harmony XA2, plastic
Pushbuttons, switches and pilot lights

Type of products		Contact and signaling functions	
		Illuminated pushbuttons	Illuminated double-headed pushbuttons
			
Description of range		■ Illuminated pushbuttons with integral LED, spring return: flush push	■ Illuminated double-headed pushbuttons with integral LED, spring return
Features	Products	Complete units	
	Shape of head	Circular	Rectangular
Drilling or cut-out for mounting		Ø 22 mm/0.866 in.	
Degree of protection		IP 65 conforming to standard IEC 60529	IP 40 conforming to standard IEC 60529
International standards		IEC 60947-5-1, EN 60947-5-1, GB/T 14048.1-93, GB/14048.5-93	
Product certification		CCC, EAC, C€	CCC, C€, and EAC
Cabling		Screw clamp terminal connections	
Mounting	Panel thickness	Ø 1 to 6 mm/0.04 to 0.24 in.	
Type references		XA2EW3●●●	XA2EW7L3741●5
Pages		15	13

Signaling functions	
Pilot lights	Indicators
	
Description of range	
Features	
Drilling or cut-out for mounting	
Degree of protection	
International standards	
Product certification	
Cabling	
Mounting	
Type references	
Pages	

Presentation

The Easy Harmony XA2 range of Ø 22/0.866 in. plastic control and signaling units combines simplicity of installation, flexibility and robustness. It meets the requirements of the majority of industrial applications. The metallic-look ring design on the pushbuttons and switches gives them a modern look. These products are available in the form of complete units.

■ This range includes:

- Contact functions: pushbuttons, selector/key switches, Emergency switching off pushbuttons, and double-headed pushbuttons designed for parameter settings, adjustments, and start/stop control of machines and installations
- Contact and signaling functions: illuminated pushbuttons and double-headed illuminated pushbuttons designed for control and signaling functions
- Signaling functions: pilot lights and indicators designed for visual signaling

■ The pushbutton, switch control (illuminated and non-illuminated), and pilot light offer is both broad and comprehensive:

- Pushbuttons, spring return with flush push, marked or unmarked, or mushroom head
- Emergency stop pushbuttons Ø 40/1.575 in., Ø 30/1.181 in., and Ø 60/2.362 in. with 2 types of head: push-pull and turn to release
- Pilot lights, indicators, and illuminated pushbuttons with integral LED
- Selector switches with different types of operator: standard handle, long handle, or key
- Choice of heads: circular and double-head
- Connection type: screw clamp connector
- Various accessories

Installation

■ Easy Harmony XA2 products are both simple and quick to install:

- Mounting by a single nut to the control panel,
- Body/fixing collar simply clip on the head,
- Anti-loosening system for screw clamp terminals on contact blocks.

Environment

The performance features of the Easy Harmony XA2 range meets the following specifications:

■ Degrees of protection conforming to standard IEC 60529:

- IP 65 for pushbuttons, Emergency switching off pushbuttons, illuminated pushbuttons, and pilot lights
- IP 54 for key selector switch and indicators
- IP40 for double-headed pushbuttons

■ International standards:

- IEC 60947-5-1, EN 60947-5-1, GB/T 14048.1-93, GB/14048.5-93

■ Product certification:

- CCC, EAC, CEC

For more technical information, please refer to the Schneider Electric website, Easy Harmony XA2 offer.

Complete units

Pushbuttons, spring return	Type of push
	Degree of protection
	Color
	Reference
	Pages

Contact functions




Flush push, unmarked	Flush push, marked	Mushroom head
IP65	IP65	IP65
White, Black, Green, Yellow, Blue, and Red	Green, Black, White, Red and Blue	Black, Green and Red
XA2EA●1/EA42	XA2EA33●1/EA43●2/ XA2EA6511	XA2EC●1/EC42
12	12	12



Pushbuttons, push-push	Type of push
	Degree of protection
	Color
	Reference
	Pages

Flush push, unmarked
IP65
Black, Green, Yellow and Red
XA2EH0●1/EH042
12



Double-headed pushbuttons, spring return	Type of push
	Degree of protection
	Color
	Reference
	Pages

Flush push
IP40
Green and Red
XA2EA7A3415
13



Emergency switching off pushbuttons	Type of push
	Degree of protection
	Color
	Reference
	Pages

Turn to release and push-pull (Ø 30 mm/1.181 in., Ø 40 mm/1.575 in., Ø 60 mm/1.362 in.)
IP65
Red
XA2ET42/ES●42
13

Complete units (continued)

Contact functions



Selector switches and key switches

Type of push

Degree of protection

Reference

Page

Standard handle, 2 or 3 positions

IP65

XA2ED●●

Long handle, 2 or 3 positions

IP65

XA2EJ●●

Key, 2 or 3 positions

IP54

XA2EG21/EG●3

14

Contact and signaling functions



Illuminated pushbuttons, spring return

Type of push

Degree of protection

LED

Color

Reference

Pages

Flush push


IP65

Integral LEDs 24, 220...230, or 380...400 V

White, Green, Red, Amber and Blue

XA2EW3●B1/3●M1/ 3●Q1

15



Double-headed pushbuttons, spring return with pilot light block

Type of push

Degree of protection

LED

Color

Reference

Pages

Flush push

IP40

Integral LEDs 24 or 220...230 V

Red and Green

XA2EW7L3741B5, XA2EW7L3741M5

13

Complete units (continued)

Signaling functions



Pilot lights	Degree of protection	IP65
	LED	Integral LEDs 12 V, 24 V, 30 V, 48 V, 60...63.5 V, 110 V, 220...230 V, and 380...400 V
	Color	White, Green, Red, Amber, Blue, Yellow and Bi-color (Green/Red)
	Reference	XA2EV●●LC/EV●E●LC/EV●D●LC/EV●●34LC
	Pages	17



Indicators	Degree of protection	IP54
	LED	Integral LEDs 110 V, 220...230 V, and 380...400 V
	Color	Red and Green
	Reference	XA2EV●34●PC
	Pages	18

Control and signaling units Ø 22

Easy Harmony XA2, plastic

Spring return pushbuttons, marked and unmarked

Mushroom head pushbuttons, spring return



XA2EA31



XA2EA4342



XA2EC31



XA2EH021

Spring return pushbuttons with flush push

Shape of head	Type of contacts		Color of push	Marking	Reference	Weight kg/lb
	NO	NC				
Unmarked						
	1	–	White	–	XA2EA11	0.032/0.071
	1	–	Black	–	XA2EA21	0.032/0.071
	1	1	Black	–	XA2EA21	0.032/0.071
	1	–	Green	–	XA2EA31	0.032/0.071
	1	1	Green	–	XA2EA35	0.032/0.071
	1	–	Yellow	–	XA2EA51	0.032/0.071
	1	–	Blue	–	XA2EA61	0.032/0.071
	1	–	Red	–	XA2EA41	0.032/0.071
	–	1	Red	–	XA2EA42	0.032/0.071
	1	1	Red	–	XA2EA45	0.032/0.071

Marked						
	1	–	Green	"I"	XA2EA3311	0.032/0.071
	1	–	Black	"↑"	XA2EA3351	0.032/0.071
	1	–	White	"↑"	XA2EA3341	0.032/0.071
	–	1	Red	"O"	XA2EA4322	0.032/0.071
	–	1	Red	"STOP"	XA2EA4342	0.032/0.071
	1	–	Blue	"↕"	XA2EA6511	0.032/0.071

Mushroom head pushbuttons, spring return

Shape of head	Type of contacts		Color of push	Diameter Ø (mm)/in.	Reference	Weight kg/lb
	NO	NC				
	1	–	Black	40/1.575	XA2EC21	0.052/0.115
	1	–	Green	40/1.575	XA2EC31	0.052/0.115
	–	1	Red	40/1.575	XA2EC42	0.052/0.115

Pushbuttons, push-push with flush push

Shape of head	Type of contacts		Color of push	Reference	Weight kg/lb
	NO	NC			
Complete unit					
	1	–	Black	XA2EH021	0.04/0.088
	1	–	Green	XA2EH031	0.04/0.088
	–	1	Red	XA2EH042	0.04/0.088
	1	–	Yellow	XA2EH051	0.04/0.088


Control and signaling units Ø 22

Easy Harmony XA2, plastic

Double-headed pushbuttons, spring return

Emergency switching off pushbuttons

XA2E_CP20011_2



XA2EA7A3415

Double-headed pushbuttons, spring return

Shape of head	Description	Type of contacts	Caps (1)		Reference	Weight kg/lb
			Marking	Background color		
		NO				
		NC				

Complete units



1 flush push, green

1

1

"I"

Green

[XA2EA7A3415](#)

0.048/0.106

1 flush push, red

"O"

Red

Double-headed pushbuttons with 1 white central pilot light block

Shape of head	Description	Type of contacts	Caps (1)		Pilot light voltage V	Reference	Weight kg/lb
			Marking	Background color			
		NO					
		NC					

Complete units



1 flush push, green

1

1

"I"

Green

24 ~

[XA2EW7L3741B5](#)

0.072/0.159

1 flush push, red

1 central pilot light block, white

"O"

Red

220...230 ~ [XA2EW7L3741M5](#)

0.072/0.159

Protected
LED

XA2E_CP20012_2



XA2EW7L3741●●

Emergency switching off pushbuttons

Shape of head	Type of push	Type of contacts	Diameter Ø (mm)/in.	Reference	Weight kg/lb
		NC			
	Push-pull	1	40/1.575	XA2ET42	0.088/0.194
	Turn to release	1	30/1.181	XA2ES442	0.056/0.123
			40/1.575	XA2ES542	0.058/0.128
			60/2.362	XA2ES642	0.064/0.141

Note: For information on dimensions, please refer to the Schneider Electric website, Easy Harmony XA2 offer.

(1) These caps are factory assembled and cannot be removed (risk of damage).

PFI32022



XA2ET42

Control and signaling units Ø 22

Easy Harmony XA2, plastic

Selector switches, with standard or long handle

Key switches

PF132031



XA2ED53

Selector switches, with standard handle or with long handle						
Shape of head	Type of push	Type of contacts		Number and type of positions	Reference	Weight kg/lb
		NO	NC			
	Standard handle	1	—	2 - stay put	XA2ED21	0.04/0.088
		1	1	2 - stay put	XA2ED25	0.054/0.119
		2	—	3 - stay put	XA2ED33	0.054/0.119
		2	—	3 - spring return from 2 sides	XA2ED53	0.054/0.119
		1	—	2 - spring return	XA2ED41	0.041/0.090
	Long handle	1	—	2 - stay put	XA2EJ21	0.041/0.090
		1	1	2 - stay put	XA2EJ25	0.041/0.090
		2	—	3 - stay put	XA2EJ33	0.055/0.121
		2	—	3 - spring return from 2 sides	XA2EJ53	0.055/0.121

PF132041



XA2EG03

Key switches						
Shape of head	Type of push	Type of contacts		Number and type of positions	Reference	Weight kg/lb
		NO	NC			
	Key	1	—	2 - stay put, one side pull-out	XA2EG21	0.064/0.141
		2	—	2 - stay put, two sides pull-out	XA2EG43	0.078/0.172
		2	—	2 - spring return, one side pull-out	XA2EG63	0.078/0.172
		2	—	3 - spring return from 2 sides, middle pull-out	XA2EG73	0.078/0.172
		2	—	3 - stay put, middle pull-out	XA2EG33	0.078/0.172
		2	—	3 - stay put, 3 sides pull-out	XA2EG03	0.078/0.172

Note: For information on dimensions, please refer to the Schneider Electric website, Easy Harmony XA2 offer.

Control and signaling units Ø 22

Easy Harmony XA2, plastic

Illuminated pushbuttons with flush push

Bulbs for illuminated pushbuttons

Contact functions for all XA2 pushbuttons and switches



XA2EW36B1

Illuminated pushbuttons with integral LED						
Shape of head	Type of push	Supply voltage V	Type of contacts		Color	Reference
			NO	NC		
	Flush push	24 ~	1	—	White	XA2EW31B1
					Green	XA2EW33B1
					Red	XA2EW34B1
					Amber	XA2EW35B1
					Blue	XA2EW36B1
		220-230 ~	1	—	Red	XA2EW34B2
					White	XA2EW31M1
					Green	XA2EW33M1
					Red	XA2EW34M1
					Amber	XA2EW35M1
		380-400 ~	1	—	Blue	XA2EW36M1
					Red	XA2EW34M2
					White	XA2EW31Q1
					Red	XA2EW34Q2

Note: For information on dimensions, please refer to the Schneider Electric website, Easy Harmony XA2 offer.

Control and signaling units Ø 22

Easy Harmony XA2, plastic

Illuminated pushbuttons with flush push

Bulbs for illuminated pushbuttons

Contact functions for all XA2 pushbuttons and switches



DL1LED244



DL1LED246



ZB5AZ905



ZB5AZ902



ZA2EE102

Bulbs with BA 9s base fitting and associated accessories					
Description	Characteristics	Color	Sold in lots of	Unit reference	Weight kg/lb
LEDs	24 $\sim$	White	10	DL1LED241	0.002/0.004
		Green	10	DL1LED243	0.002/0.004
		Red	10	DL1LED244	0.002/0.004
		Yellow	10	DL1LED245	0.002/0.004
		Blue	10	DL1LED246	0.002/0.004

Description	Application	Sold in lots of	Unit reference	Weight kg/lb
Bezel tool	Tightening head fixing nut	1	ZB5AZ905	0.016/0.035
Anti-rotation plate	Prevents head from rotation	10	ZB5AZ902	0.008/0.018

Contact functions (for all XA2 pushbuttons and switches)					
Screw clamp terminal connections					
Description	To be used with	Type of contacts	Sold in lots of	Unit reference	Weight kg/lb
Contact blocks	All XA2 pushbuttons and switches	 NO	1	ZA2EE101	0.014/0.031
		 NC			
Contact blocks	All XA2 pushbuttons and switches	1	1	ZA2EE101	0.014/0.031
		— 1	1	ZA2EE102	0.014/0.031

XA2E_CP20053_2



XA2EVB4LC

XA2E_CP20056_2



XA2EVC6LC

XA2E_CP20054_2



XA2EVE4LC

Pilot lights with integral LED, screw clamp terminal connection

Shape of head	Supply voltage V	Color of lens	Sold in lots of	Reference	Weight kg/lb
	12 ~	White	10	XA2EVJ1LC	0.019/0.041
		Green	10	XA2EVJ3LC	0.019/0.041
		Red	10	XA2EVJ4LC	0.019/0.041
		Amber	10	XA2EVJ5LC	0.019/0.041
		Blue	10	XA2EVJ6LC	0.019/0.041
		Yellow	10	XA2EVJ8LC	0.019/0.041
	24 ~	White	10	XA2EVB1LC	0.019/0.041
		Green	10	XA2EVB3LC	0.019/0.041
		Red	10	XA2EVB4LC	0.019/0.041
		Amber	10	XA2EVB5LC	0.019/0.041
		Blue	10	XA2EVB6LC	0.019/0.041
		Yellow	10	XA2EVB8LC	0.019/0.041
		Green/Red	5	XA2EVB34LC	0.022/0.049
	30 ~	White	10	XA2EVC1LC	0.019/0.041
		Green	10	XA2EVC3LC	0.019/0.041
		Red	10	XA2EVC4LC	0.019/0.041
		Amber	10	XA2EVC5LC	0.019/0.041
		Blue	10	XA2EVC6LC	0.019/0.041
		Yellow	10	XA2EVC8LC	0.019/0.041
	48 ~	White	10	XA2EVE1LC	0.019/0.041
		Green	10	XA2EVE3LC	0.019/0.041
		Red	10	XA2EVE4LC	0.019/0.041
		Amber	10	XA2EVE5LC	0.019/0.041
		Blue	10	XA2EVE6LC	0.019/0.041
		Yellow	10	XA2EVE8LC	0.019/0.041
	60...63.5 ~	White	10	XA2EVEE1LC	0.019/0.041
		Green	10	XA2EVEE3LC	0.019/0.041
		Red	10	XA2EVEE4LC	0.019/0.041
		Amber	10	XA2EVEE5LC	0.019/0.041
		Blue	10	XA2EVEE6LC	0.019/0.041
		Yellow	10	XA2EVEE8LC	0.019/0.041

Note: For information on dimensions, please refer to the Schneider Electric website, Easy Harmony XA2 offer.

Pilot lights with integral LED, screw clamp terminal connection

Shape of head	Supply voltage V	Color of lens	Sold in lots of	Reference	Weight kg/lb
	110 ~	White	10	XA2EVF1LC	0.019/0.041
		Green	10	XA2EVF3LC	0.019/0.041
		Red	10	XA2EVF4LC	0.019/0.041
		Amber	10	XA2EVF5LC	0.019/0.041
		Blue	10	XA2EVF6LC	0.019/0.041
		Yellow	10	XA2EVF8LC	0.019/0.041
	220 ---	White	10	XA2EVM1LC	0.019/0.041
		Green	10	XA2EVM3LC	0.019/0.041
		Red	10	XA2EVM4LC	0.019/0.041
		Amber	10	XA2EVM5LC	0.019/0.041
		Blue	10	XA2EVM6LC	0.019/0.041
		Yellow	10	XA2EVM8LC	0.019/0.041
	220-230 ~	White	10	XA2EVM1LC	0.019/0.041
		Green	10	XA2EVM3LC	0.019/0.041
		Red	10	XA2EVM4LC	0.019/0.041
		Amber	10	XA2EVM5LC	0.019/0.041
		Blue	10	XA2EVM6LC	0.019/0.041
		Yellow	10	XA2EVM8LC	0.019/0.041
	220-230 ~	Green/Red	5	XA2EVM34LC	0.022/0.049
	380...400 ~	White	10	XA2EVQ1LC	0.019/0.041
		Green	10	XA2EVQ3LC	0.019/0.041
		Red	10	XA2EVQ4LC	0.019/0.041
		Amber	10	XA2EVQ5LC	0.019/0.041
		Blue	10	XA2EVQ6LC	0.019/0.041
		Yellow	10	XA2EVQ8LC	0.019/0.041

Indicators, screw clamp terminal connection

Shape of head	Indicator type	Supply voltage V	Color of lens	Sold in lots of	Reference	Weight kg/lb
	Isolation switch	110 ~	Green/Red	5	XA2EVF34SPC	0.027/0.058
		220...230 ~	Green/Red	5	XA2EVM34SPC	0.027/0.058
		380...400 ~	Green/Red	5	XA2EVQ34SPC	0.027/0.058
	Circuit breaker	110 ~	Green/Red	5	XA2EVF34BPC	0.027/0.058
		220...230 ~	Green/Red	5	XA2EVM34BPC	0.027/0.058
		380...400 ~	Green/Red	5	XA2EVQ34BPC	0.027/0.058
	Ground	110 ~	Green/Red	5	XA2EVF34GPC	0.027/0.058
		220...230 ~	Green/Red	5	XA2EVM34GPC	0.027/0.058
		380...400 ~	Green/Red	5	XA2EVQ34GPC	0.027/0.058

Note: For information on dimensions, please refer to the Schneider Electric website, Easy Harmony XA2 offer.

Control and signaling units Ø 22

Easy Harmony XA2, plastic

Empty control stations for XA2 pushbuttons, switches, and pilot lights



XALB01C



XALB03C

Empty control stations

Description	Characteristics	Dimension w x h x d mm/in.	Number of cut-outs	Reference	Weight kg/lb
Light gray "RAL 7035" cover Dark gray "RAL 7016" base	IP65	68 x 86 x 51/ 2.68 x 3.39 x 2	1	XALB01C	0.100/0.220
		68 x 104 x 51/ 2.68 x 4.1 x 2	2	XALB02C	0.150/0.330
		68 x 86 x 51/ 2.68 x 3.39 x 2	3	XALB03C	0.200/0.440
Yellow "RAL 1021" cover Dark gray "RAL 7016" base	IP65	68 x 86 x 51/ 2.68 x 3.39 x 2	1	XALB01YC	0.100/0.220

D					
DL1LED241	16	XA2EVE3LC	17	XA2EW36B1	15
DL1LED243	16	XA2EVE4LC	17	XA2EW36M1	15
DL1LED244	16	XA2EVE5LC	17	XA2EW7L3741B5	13
DL1LED245	16	XA2EVE6LC	17	XA2EW7L3741M5	13
DL1LED246	16	XA2EVE8LC	17	XALB01C	19
X		XA2EVEE1LC	17	XALB01YC	19
XA2EA11	12	XA2EVEE3LC	17	XALB02C	19
XA2EA21	12	XA2EVEE4LC	17	XALB03C	19
XA2EA31	12	XA2EVEE5LC	17	Z	
XA2EA3311	12	XA2EVEE6LC	17	ZA2EE101	16
XA2EA3341	12	XA2EVEE8LC	17	ZA2EE102	16
XA2EA3351	12	XA2EVF1LC	18	ZB5AZ902	16
XA2EA35	12	XA2EVF34BPC	18	ZB5AZ905	16
XA2EA41	12	XA2EVF34GPC	18		
XA2EA42	12	XA2EVF34SPC	18		
XA2EA4322	12	XA2EVF3LC	18		
XA2EA4342	12	XA2EVF4LC	18		
XA2EA45	12	XA2EVF5LC	18		
XA2EA51	12	XA2EVF6LC	18		
XA2EA61	12	XA2EVF8LC	18		
XA2EA6511	12	XA2EVJ1LC	17		
XA2EA7A3415	13	XA2EVJ3LC	17		
XA2EC21	12	XA2EVJ4LC	17		
XA2EC31	12	XA2EVJ5LC	17		
XA2EC42	12	XA2EVJ6LC	17		
XA2ED21	14	XA2EVJ8LC	17		
XA2ED25	14	XA2EVM1LC	18		
XA2ED33	14	XA2EVM34BPC	18		
XA2ED41	14	XA2EVM34GPC	18		
XA2ED53	14	XA2EVM34LC	18		
XA2EG03	14	XA2EVM34SPC	18		
XA2EG21	14	XA2EVM3LC	18		
XA2EG33	14	XA2EVM4LC	18		
XA2EG43	14	XA2EVM5LC	18		
XA2EG63	14	XA2EVM6LC	18		
XA2EG73	14	XA2EVM8LC	18		
XA2EH021	12	XA2EVMD1LC	18		
XA2EH031	12	XA2EVMD3LC	18		
XA2EH042	12	XA2EVMD4LC	18		
XA2EH051	12	XA2EVMD5LC	18		
XA2EJ21	14	XA2EVMD6LC	18		
XA2EJ25	14	XA2EVMD8LC	18		
XA2EJ33	14	XA2EVQ1LC	18		
XA2EJ53	14	XA2EVQ34BPC	18		
XA2ES442	13	XA2EVQ34GPC	18		
XA2ES542	13	XA2EVQ34SPC	18		
XA2ES642	13	XA2EVQ3LC	18		
XA2ET42	13	XA2EVQ4LC	18		
XA2EVB1LC	17	XA2EVQ5LC	18		
XA2EVB34LC	17	XA2EVQ6LC	18		
XA2EVB3LC	17	XA2EVQ8LC	18		
XA2EVB4LC	17	XA2EW31B1	15		
XA2EVB5LC	17	XA2EW31M1	15		
XA2EVB6LC	17	XA2EW31Q1	15		
XA2EVB8LC	17	XA2EW33B1	15		
XA2EVC1LC	17	XA2EW33M1	15		
XA2EVC3LC	17	XA2EW34B1	15		
XA2EVC4LC	17	XA2EW34B2	15		
XA2EVC5LC	17	XA2EW34M1	15		
XA2EVC6LC	17	XA2EW34M2	15		
XA2EVC8LC	17	XA2EW34Q2	15		
XA2EVE1LC	17	XA2EW35B1	15		
		XA2EW35M1	15		

Life Is On



Learn more about our products at
www.se.com

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric
Photos: Schneider Electric

Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier - CS 30323
F-92500 Rueil-Malmaison Cedex
France

DIA5ED2140104EN
March 2022 - V7.0



DISTRIBUIDOR AUTORIZADO

Visítanos en **sonemas.pe** o en nuestras tiendas:

Lima
Sucursal Marsano
 Dirección: Av. Tomas Marsano 1411 Stand 28 y 40 - Surquillo
 Horario: Lunes a Viernes de 8:30 am a 5:45 pm
 Sábado: 9:00 am a 1:00 pm
 Telf. 981189467

Lima
Sucursal Malvinas
 Dirección: Av. Guillermo Denney N° 481 Tienda 112 y 113 - Lima Cercado
 Horario: Lunes a Viernes de 8:30 a 06:00 pm
 Sábado: 8:30 am a 1:00 pm
 Telf. 994019384

Lima
Sucursal Bambas
 Dirección: Jr. Bambas 449 - Cercado de Lima
 Horario: Lunes a Viernes de 8:00 am a 5:45 pm
 Sábado: 9:00 am a 1:00 pm
 Telf. 983401479

Lima
Sucursal San Isidro
 Dirección: Av. República de Panamá 3517 Oficina 602
 Horario: Lunes a Viernes de 8:30 am a 06:30 pm
 Telf. 983401775

Lima
Sucursal Minería
 Dirección: Av. República de Panamá 3517 Oficina 602
 Horario: Lunes a Viernes de 8:30 am a 06:30 pm
 Telf. 983401775

Chiclayo
Sucursal Chiclayo
 Dirección: Calle Diego Ferré N°532
 Horario: Lunes a Viernes de 8:30 am a 06:00 pm
 Sábado: 8:30 am a 1:00 pm
 Telf. 978512003

Trujillo
Sucursal América
 Dirección: Av. América del norte 1434 - 1442 Urb. Las Quintanas
 Horario: Lunes a Viernes de 8:30 am a 06:00 pm
 Sábado: 8:00 am a 1:00 pm
 Telf. 949624041

Trujillo
Sucursal Palermo
 Dirección: Av. José Eguren 386 2do Piso Tienda N°2 Urb. Chicago
 Horario: Lunes a Viernes de 8:30 am a 06:00 pm
 Sábado: 8:30 am a 1:00 pm
 Telf. 945427481

Lima
Sucursal San Juan de Lurigancho
 Dirección: Jr. San Aurelio 947. urb. Parcelación Semi - Rutas Azucareras, Senda 11 (Galería La Pirámide)
 Horario: Lunes a Viernes de 8:30 am a 6:30 pm
 Sábado: 8:00 am a 12:00 pm
 Telf. 994074825

Piura
Sucursal Piura
 Dirección: Av. Los Cocos 595 Mz J Lt 1 Urb. Grau
 Horario: Lunes a Viernes de 8:30 am a 06:00 pm
 Sábado: 8:30 am a 1:30 pm
 Telf. 983401582

Arequipa
Sucursal Arequipa
 Dirección: Fco. Gomez de la Torre 106 Urb. La Victoria
 Horario: Lunes a Viernes de 8:00 am a 05:51 pm
 Sábado: 8:30 am a 1:00 pm
 Telf. 994259479



Lima
Chimbote



Piura
Cambio de tienda
 Av. Guzmán N° 348 - 354
PIURA



Conoce nuestro aplicativo:



Síguenos en nuestras redes sociales como Sonepar Perú.



Plataforma Digital

Compra de una manera más fácil, rápida y segura a través de nuestro Aplicativo móvil Sonemas



- ① Ahorro de Tiempo
- ② Stock on-line
- ③ Cotiza y pide 24/7
- ④ Fichas Técnicas

www.sonemas.pe

1 Busca Sonemas en Apple Store o Google Play y descárgate la app.



2 Registra tus datos, escríbenos al WhatsApp o envíanos un correo a marketing@sonepar.pe para crear tu usuario y contraseña.



3 Ingresa con tu usuario y contraseña a la app y acepta los términos y condiciones.



4 Busca el producto que necesitas por código de referencia o descripción, revisa el stock y añádelo al carrito de compras.

