

FICHA TÉCNICA DE PRODUCTO LED SUPERSTAR PAR16



Áreas de Aplicación

- Uso residencial y comercial
- Destaca ambientes y objetos
- Iluminación acogedora

Características y Beneficios

- Hasta 90% de ahorro en energía*
- Diseño elegante
- No calienta el ambiente
- Atenuable
- Alto flujo luminoso
- Garantía de 3 años

AHORRO

90%

**VIDA ÚTIL
25.000h**



*Comparado con una lampara de halógeno

Ficha técnica de producto

SAP	7015182 / 7015183	7015180	7015184
Modelo	PAR16	PAR16 DIM	PAR16 HO
Potencia nominal	4.8W	5 W	6W
Equivalencia	35W	45W	50W
Tensión nominal	100-240V	220V	100-240V
Flujo luminoso	350 lm	470 lm	525 lm
Temperatura de color	3000 K / 6500 K	3000 K	3000 K
Eficiencia Luminosa	73 lm/W	94 lm/W	87.5 lm/W
Temperatura de operación	-20° + 45°C	-20° + 45°C	-20° + 45°C
Índice de Reproducción de color (IRC)	>80	>80	>80
Factor de Potencia	≥0.5	≥0.9	≥0.7
Ángulo de Apertura	35°	25°	35°
Base	GU10	GU10	GU10
Intensidad Luminosa	750 cd	1240 cd	900 cd
Atenuable	No	Si	No
Vida útil	25.000h	25.000h	25.000h
Garantía	3 años	3 años	3 años

Diseño técnico

	A (mm)	B (mm)
7015180	48	48
7015182	140	162
7015183	140	162
7015184	140	162




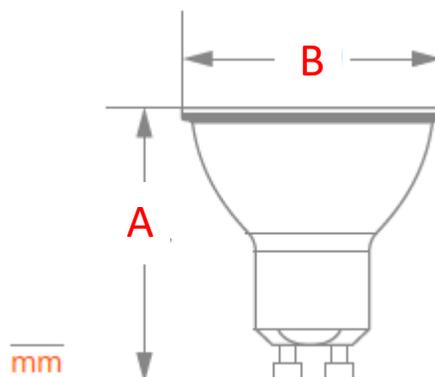


Diagrama Fotométrico

I Curva de iluminación-distancia

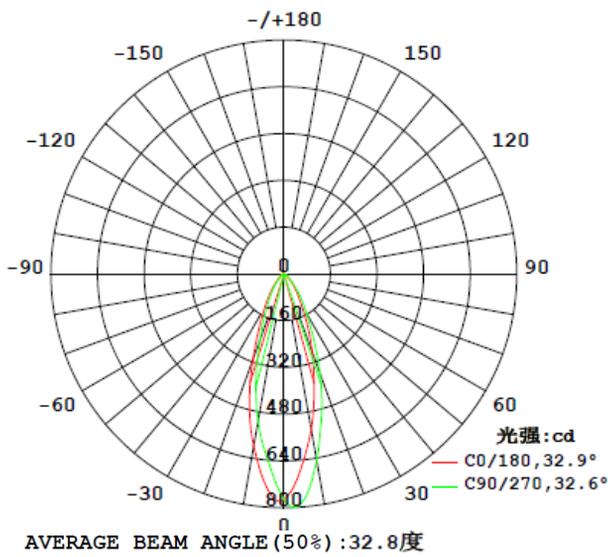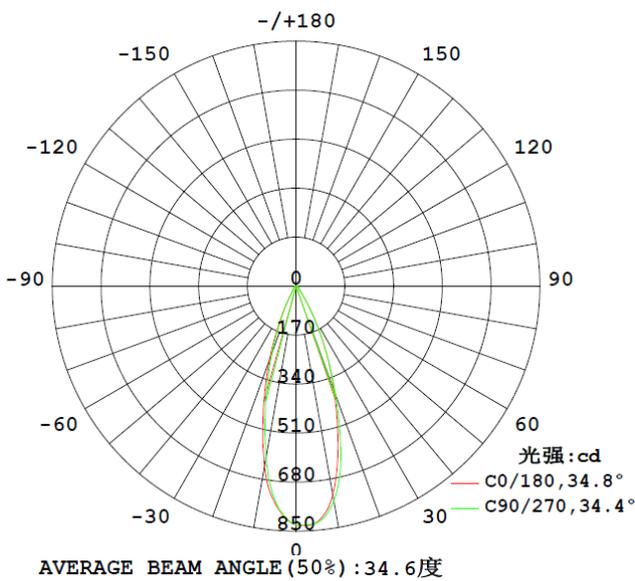

PAR16 3000K

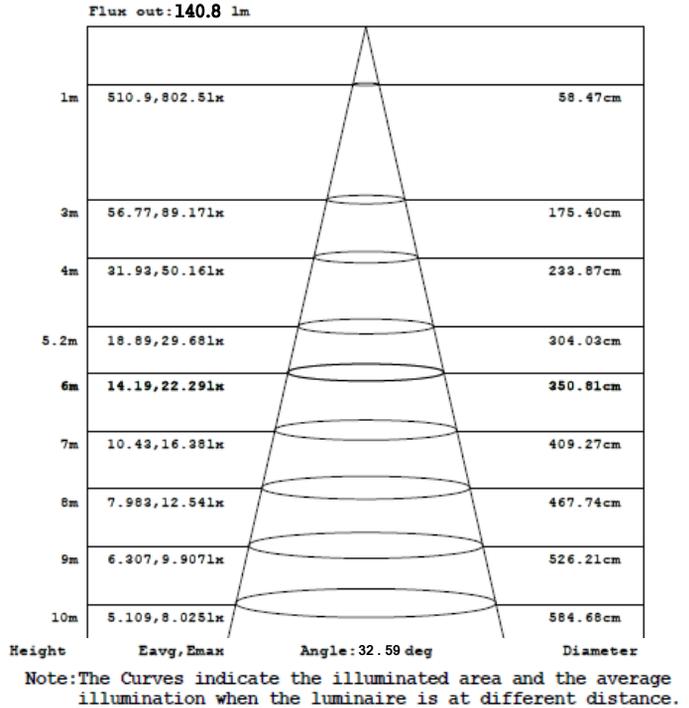

PAR16 6500K



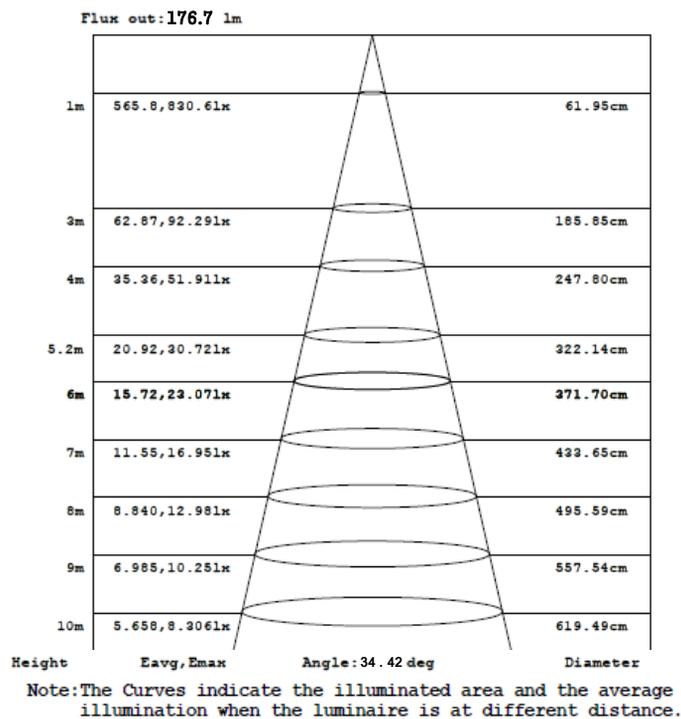


Diagrama Fotométrico


I Curva de iluminación-distancia

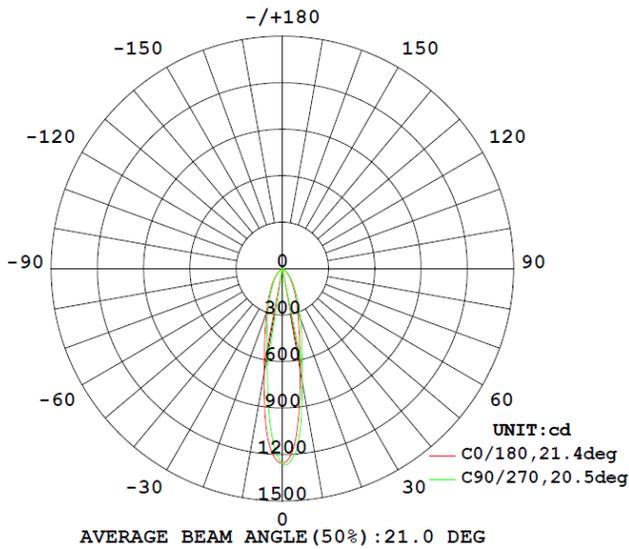


PAR16 DIM 220V

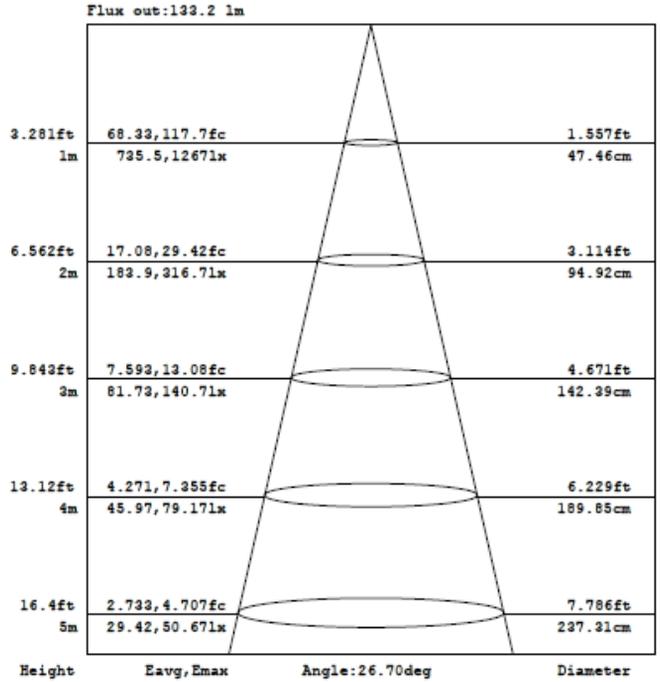

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

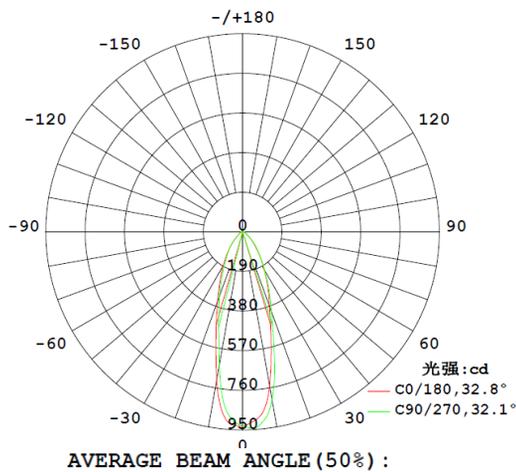

PAR16 HO

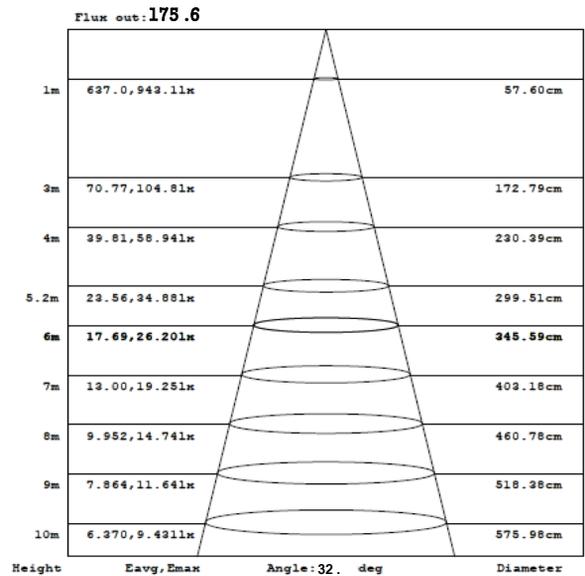

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Datos logísticos

Código SAP	Descripción	EAN10	EAN40	EAN10 Peso neto (g)	EAN40 Peso neto (g)
7015180	LED PAR16 DIM 5W 3000K 470lm 220V GU10 G2	4058075814134	4058075814141	40	480
7015182	LED PAR16 4.8W 3000K 350lm BIV GU10 G2	4058075060012	4058075060029	50	600
7015183	LED PAR16 4.8W 6500K 350lm BIV GU10 G2	4058075060050	4058075060067	50	600
7015184	G3 LED PAR16/830 100-240V 6W 525lm GU10	4058075060036	4058075060043	55	660

Código SAP	Dimensiones EAN10 (mm)	EAN10 Peso (g)	Dimensiones EAN40 (mm)	EAN40 Peso (g)	Cantidad por caja
7015180	48 x 48 x 60	45	307 x 106 x 172	640	12
7015182	140 x 162 x 51	65	301 x 201 x 172	1000	12
7015183	140 x 162 x 51	65	301 x 201 x 172	1000	12
7015184	140 x 162 x 51	70	301 x 201 x 172	1060	12