




Rex

## PX-0432-BLA

Aplique IP54 Rex LED 6.6 Blanco cálido - 3000K ON-OFF Blanco 680

### CARACTERÍSTICAS TÉCNICAS



Potencia total luminaria : 6.6W

Lúmenes reales : 244

Lúmenes nominales : 680

Lm / W reales : 37

Temperatura de color correlacionada (CCT) : Blanco cálido - 3000K

Ángulo Ópticas / Reflector : FLOOD 81°

Material de la estructura : Aluminio

Acabado estructura : Blanco

Material del difusor : Cristal

Acabado difusor : Transparente

Voltaje / Frecuencia : 100-240V/50-60Hz

Protocolo de regulación : ON-OFF

Power Factor : 0.50

Vida útil : 36.000h L70B30

Garantía : 5 Años

Luminaria fácilmente reciclable

### CARACTERÍSTICAS LUMINOTÉCNICAS

CRI: 80



MacAdam steps: 3

Riesgo fotobiológico: RG1

UGR

UGR Transversal: 20.7

UGR Longitudinal: 14.3



Portalámparas	Cantidad	Potencia fuente de luz (W)
LED	1	5.2W

### LOGÍSTICA

Peso neto (Kg): 0.42

Peso embalado (Kg): 0.47

Embalaje: 85mm x 85mm x 85mm

27 Un



**Luminaire**


Code PX-0432-BLA  
Name APLIQUE FORLIGHT LEDS

**Measur.**

Code PX-0432-ANT  
Name APLIQUE FORLIGHT LEDS

Luminaire Flux	243.97 lm	Luminaire Power	6.64 W	Efficacy	36.74 lm/W	Efficiency	100.00%
Lamps Flux	243.97 lm	Maximum value	512.34 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	80 mm	Width	80 mm	Height	80 mm
Rectangular Luminous Area		Length	45 mm	Width	75 mm	Height	0 mm
Horizontal Luminous Area	0.003375 m2	Emitting area on Plane 180°		Emitting area on Plane 270°		Emitting area on Plane 0°	0.000000 m2
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 90°	0.000000 m2	Glare area at 76°			0.000816 m2
Coordinate system	CG	Symmetry Type	Double Symmetrical				
Date	10-10-2017	Maximum Gamma Angle	180				
Measurement Distance	0.00	Measurement Flux	243.97 lm				
Operator	Asselum T2	Source Voltage [V]					
Temperature	25.00 °C	Source current [A]					
Humidity	60.00 %	Photocell					
Notes							

Line	Code	Luminaire Lamps Name	Flux [lm]	Pow. [W]	Q.ty
	PX-0432-ANT	PX-0432-ANT	243.97	6.64	1
C.I.E.	79 98 99 81 100	D DIN 5040	B61		
F UTE	0.81 B + 0.19 T	B NBN	BZ 1		

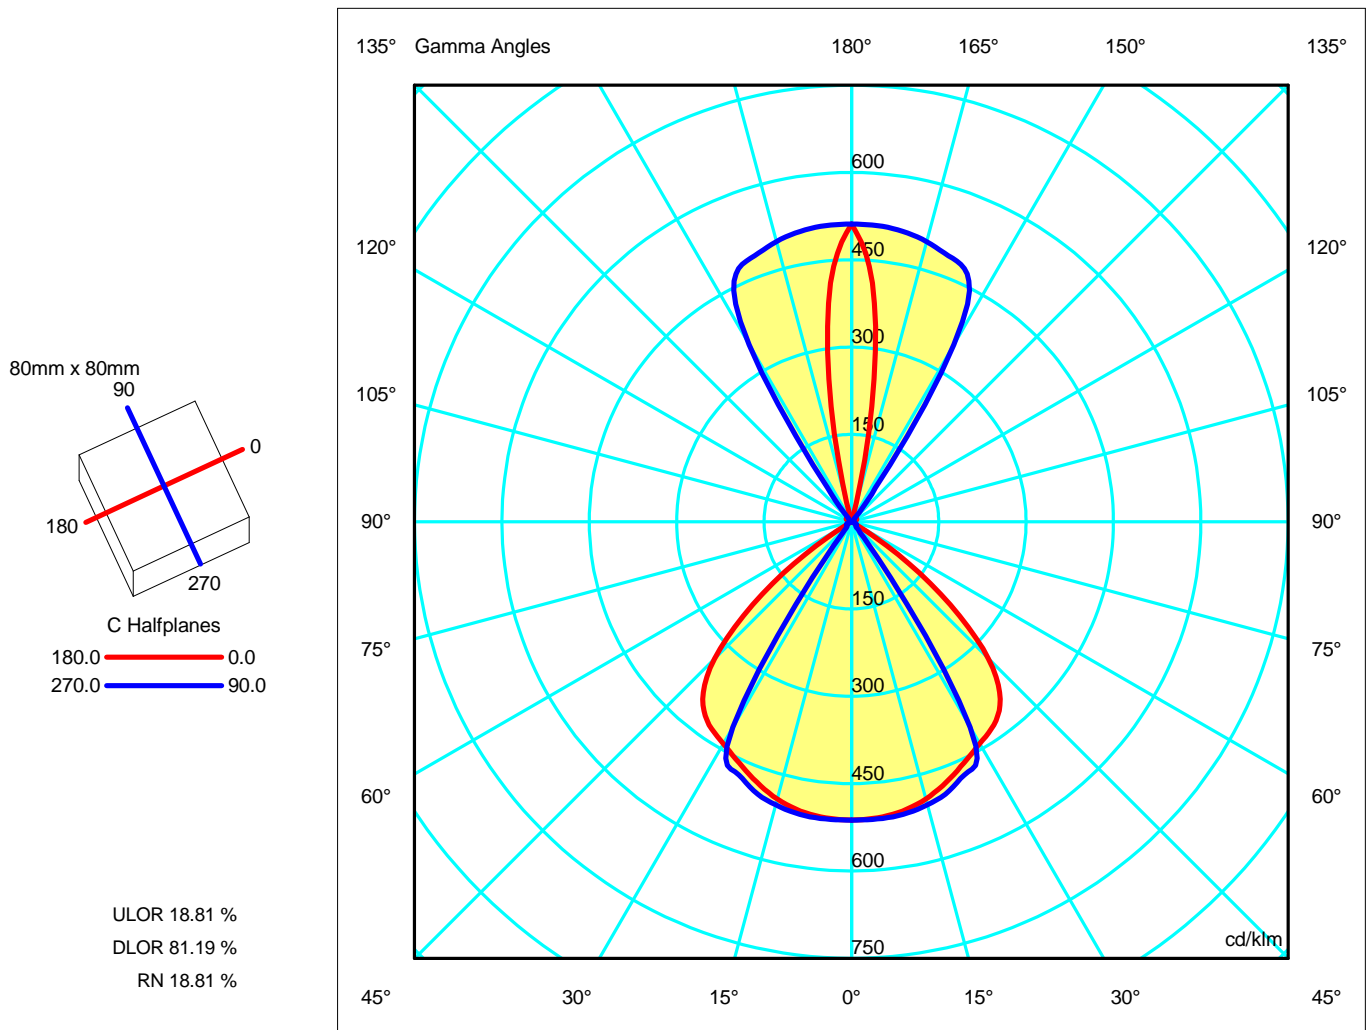



**Luminaire**

Code PX-0432-BLA  
Name APLIQUE FORLIGHT LEDS

**Measur.**

Code PX-0432-ANT  
Name APLIQUE FORLIGHT LEDS

Luminaire Flux	243.97 lm	Luminaire Power	6.64 W	Efficacy	36.74 lm/W	Efficiency	100.00%
Lamps Flux	243.97 lm	Maximum value	512.34 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

**Luminous Intensity Table cd/klm Table 1/1**

	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	512.34	512.34	512.34	512.34	512.34	512.34	512.34
G 5.0	510.52	510.64	510.98	511.44	511.87	512.16	512.27
G 10.0	504.36	505.06	506.65	508.20	509.41	510.10	510.31
G 15.0	492.85	494.57	497.46	500.04	502.01	503.15	503.37
G 20.0	475.85	478.38	481.97	486.71	491.41	492.13	491.43
G 25.0	456.84	458.92	462.32	467.55	471.76	471.84	473.80
G 30.0	440.16	440.70	440.18	442.24	445.53	430.20	407.43
G 35.0	425.92	426.12	418.10	420.72	344.96	166.13	117.32
G 40.0	397.13	401.19	397.28	315.12	83.31	32.75	18.72
G 45.0	332.51	344.77	352.81	113.85	18.41	11.28	10.36
G 50.0	221.64	241.83	246.56	24.93	10.07	10.10	10.18
G 55.0	97.33	117.84	114.53	9.58	9.67	9.89	10.09
G 60.0	3.24	16.38	27.82	8.93	9.23	9.50	9.73
G 65.0	3.09	4.07	5.19	6.71	8.40	8.70	8.75
G 70.0	2.94	3.62	4.44	5.51	6.90	6.79	6.74
G 75.0	2.79	3.14	3.65	4.36	5.00	4.85	4.25
G 80.0	2.52	2.75	3.07	3.30	3.53	3.23	2.42
G 85.0	2.25	2.37	2.53	2.52	2.57	2.57	1.88
G 90.0	1.98	1.98	1.97	2.07	2.07	2.21	2.07
G 95.0	1.24	1.24	2.09	2.23	2.27	2.26	1.34
G100.0	1.76	1.87	2.30	2.52	2.49	2.09	1.35
G105.0	3.62	3.81	3.12	2.78	2.70	1.88	1.64
G110.0	6.93	6.16	4.57	3.05	2.89	2.34	2.37
G115.0	9.69	8.51	6.46	3.38	3.09	3.07	3.56
G120.0	10.24	10.42	6.86	3.83	3.31	3.68	4.37
G125.0	10.07	9.94	6.51	4.98	3.55	4.05	4.78
G130.0	9.90	9.75	9.97	6.10	3.85	4.39	5.05
G135.0	9.73	10.17	9.48	6.51	4.07	4.70	5.32
G140.0	7.80	8.30	7.67	5.83	3.34	7.27	8.36
G145.0	5.88	6.40	5.87	4.02	5.79	54.42	71.60
G150.0	3.95	2.81	3.82	5.38	7.30	204.01	351.72
G155.0	3.53	4.25	5.32	6.71	69.88	313.97	469.88
G160.0	5.09	5.81	6.77	28.99	182.60	381.14	486.54
G165.0	10.89	25.68	74.81	168.54	301.96	435.83	498.44
G170.0	201.06	216.27	260.39	328.42	408.25	477.25	506.68
G175.0	411.97	417.83	434.52	458.41	483.66	503.15	511.11
G180.0	511.61	511.61	511.61	511.61	511.61	511.61	511.61

**Luminaire**

Code PX-0432-BLA  
 Name APLIQUE FORLIGHT LEDS

**Measur.**



Code PX-0432-ANT  
 Name APLIQUE FORLIGHT LEDS

Luminaire Flux	243.97 lm	Luminaire Power	6.64 W	Efficacy	36.74 lm/W	Efficiency	100.00%
Lamps Flux	243.97 lm	Maximum value	512.34 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

80mm x 80mm

C Halfplanes

180.0 ———— 0.0  
 270.0 ———— 90.0

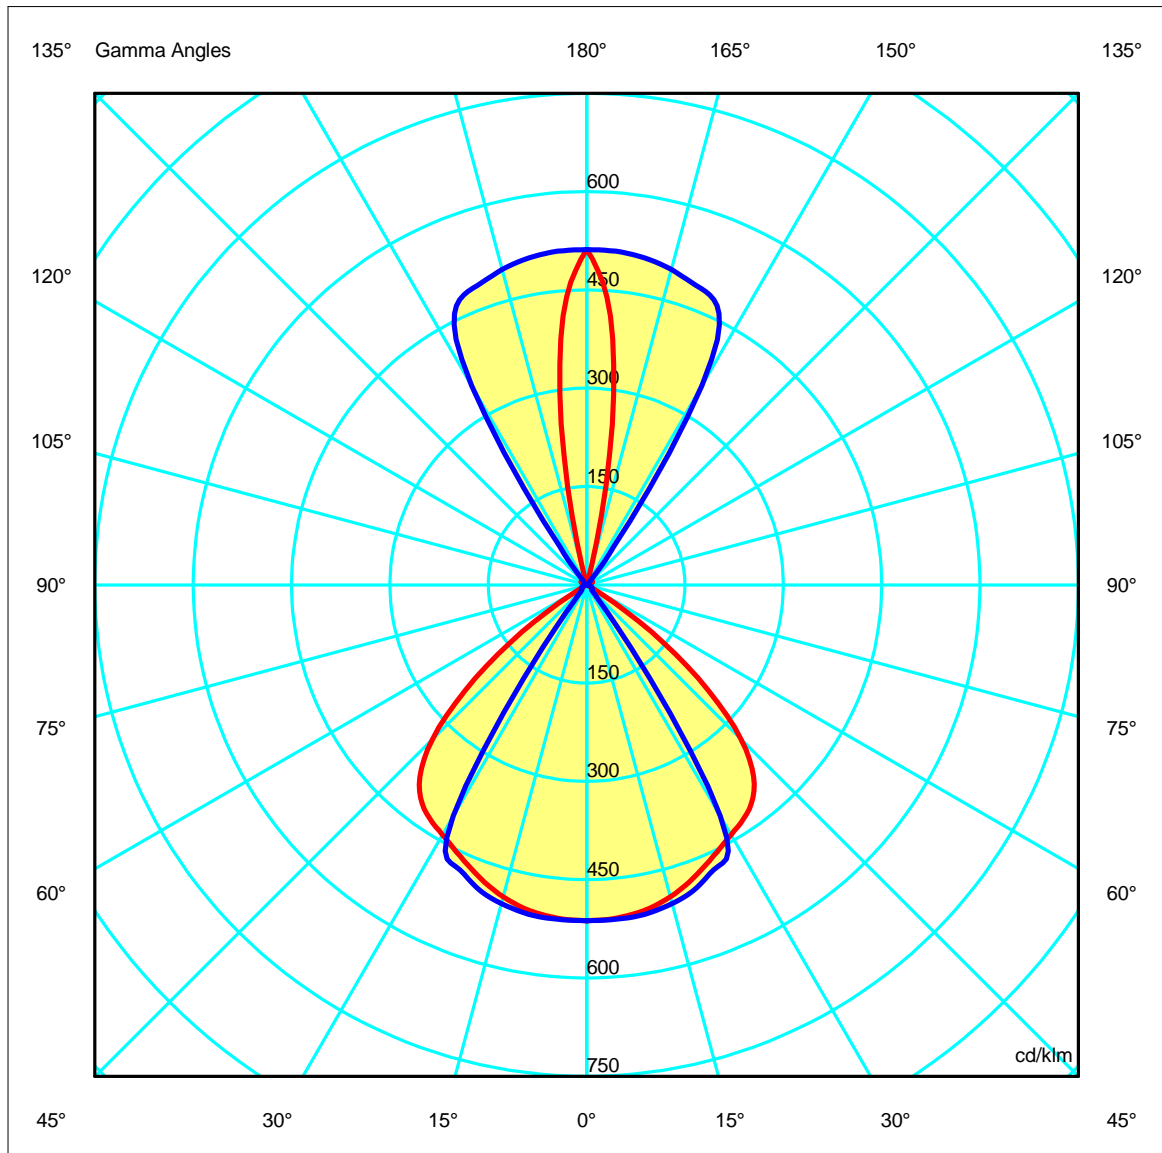

**Luminaire**

Code PX-0432-BLA  
 Name APLIQUE FORLIGHT LEDS

**Measur.**


Code PX-0432-ANT  
 Name APLIQUE FORLIGHT LEDS



Luminaire Flux	243.97 lm	Luminaire Power	6.64 W	Efficacy	36.74 lm/W	Efficiency	100.00%
Lamps Flux	243.97 lm	Maximum value	512.34 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical



Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.13	2.27	3.40	4.53	5.67	OC	0.64	1.28	1.92	2.56	3.20
OB	1.13	2.27	3.40	4.53	5.67	OD	0.64	1.28	1.92	2.56	3.20

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	125.00	124.55	120.24	111.45	103.91	81.12	23.75	0.75	0.68	0.55
OB	125.00	124.55	120.24	111.45	103.91	81.12	23.75	0.75	0.68	0.55
OC	125.00	124.98	122.81	115.59	28.62	2.53	2.46	2.13	1.04	0.46
OD	125.00	124.98	122.81	115.59	28.62	2.53	2.46	2.13	1.04	0.46

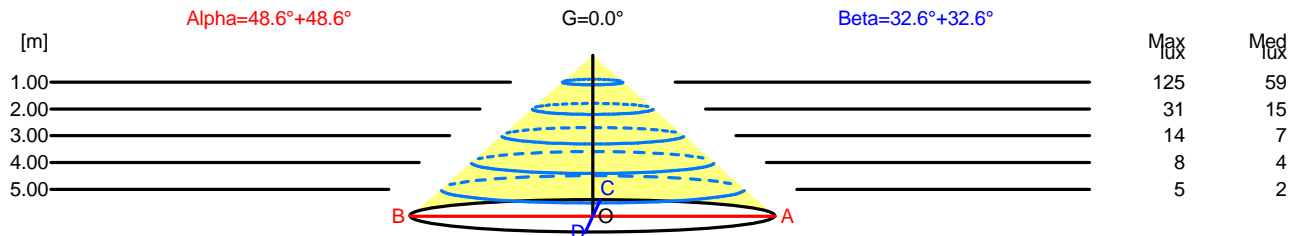

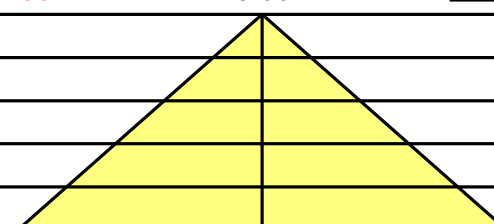H[m]	D[m]	Max lux	Med lux	Alpha=48.6°+48.6°	G=0.0
1.00	2.27	125	59		
2.00	4.53	31	15		
3.00	6.80	14	7		
4.00	9.07	8	4		
5.00	11.33	5	2		

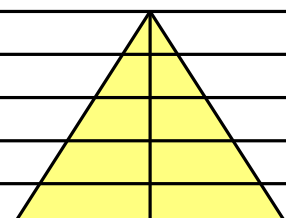H[m]	D[m]	Max lux	Med lux	Beta=32.6°+32.6°	G=0.0
1.00	1.28	125	59		
2.00	2.56	31	15		
3.00	3.84	14	7		
4.00	5.13	8	4		
5.00	6.41	5	2		



**Luminaire**

Code PX-0432-BLA  
Name APLIQUE FORLIGHT LEDS

**Measurement**

Code PX-0432-ANT  
Name APLIQUE FORLIGHT LEDS

Luminaire Flux	243.97 lm	Luminaire Power	6.64 W	Efficacy	36.74 lm/W	Efficiency	100.00%
Lamps Flux	243.97 lm	Maximum value	512.34 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

**UGR**  
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	21.1	21.9	21.7	22.4	23.0	14.0	14.8	14.5	15.2	15.8
x=2H y=3H	20.9	21.6	21.5	22.2	22.8	13.9	14.6	14.5	15.2	15.7
x=2H y=4H	20.8	21.5	21.4	22.0	22.7	13.9	14.5	14.5	15.1	15.7
x=2H y=6H	20.7	21.3	21.3	21.9	22.6	13.9	14.5	14.5	15.0	15.7
x=2H y=8H	20.7	21.2	21.3	21.8	22.5	13.8	14.4	14.5	15.0	15.7
x=2H y=12H	20.6	21.2	21.3	21.8	22.4	13.8	14.4	14.5	15.0	15.6
x=4H y=2H	20.8	21.5	21.4	22.0	22.7	14.2	14.9	14.8	15.4	16.0
x=4H y=3H	20.6	21.2	21.3	21.8	22.4	14.2	14.7	14.8	15.3	16.0
x=4H y=4H	20.5	21.0	21.2	21.6	22.3	14.2	14.7	14.9	15.3	16.0
x=4H y=6H	20.4	20.8	21.1	21.5	22.2	14.2	14.6	14.9	15.3	16.0
x=4H y=8H	20.4	20.7	21.1	21.4	22.2	14.2	14.6	14.9	15.3	16.0
x=4H y=12H	20.3	20.7	21.0	21.3	22.1	14.3	14.6	15.0	15.3	16.1
x=8H y=4H	20.4	20.7	21.1	21.4	22.2	14.1	14.5	14.8	15.1	15.9
x=8H y=6H	20.3	20.6	21.0	21.3	22.1	14.2	14.5	14.9	15.2	16.0
x=8H y=8H	20.2	20.5	21.0	21.2	22.0	14.2	14.5	15.0	15.2	16.0
x=8H y=12H	20.2	20.4	20.9	21.1	22.0	14.3	14.5	15.1	15.3	16.1
x=12H y=4H	20.3	20.6	21.0	21.3	22.1	14.1	14.4	14.8	15.1	15.9
x=12H y=6H	20.2	20.5	21.0	21.2	22.0	14.2	14.4	14.9	15.1	16.0
x=12H y=8H	20.2	20.4	20.9	21.1	22.0	14.2	14.4	15.0	15.2	16.0

**Luminaire**


Code PX-0432-BLA  
 Name APLIQUE FORLIGHT LEDS

**Measur.**

Code PX-0432-ANT  
 Name APLIQUE FORLIGHT LEDS


Luminaire Flux	243.97 lm	Luminaire Power	6.64 W	Efficacy	36.74 lm/W	Efficiency	100.00%
Lamps Flux	243.97 lm	Maximum value	512.34 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

80mm x 80mm



C Halfplanes

180.0 ———— 0.0  
 270.0 ———— 90.0

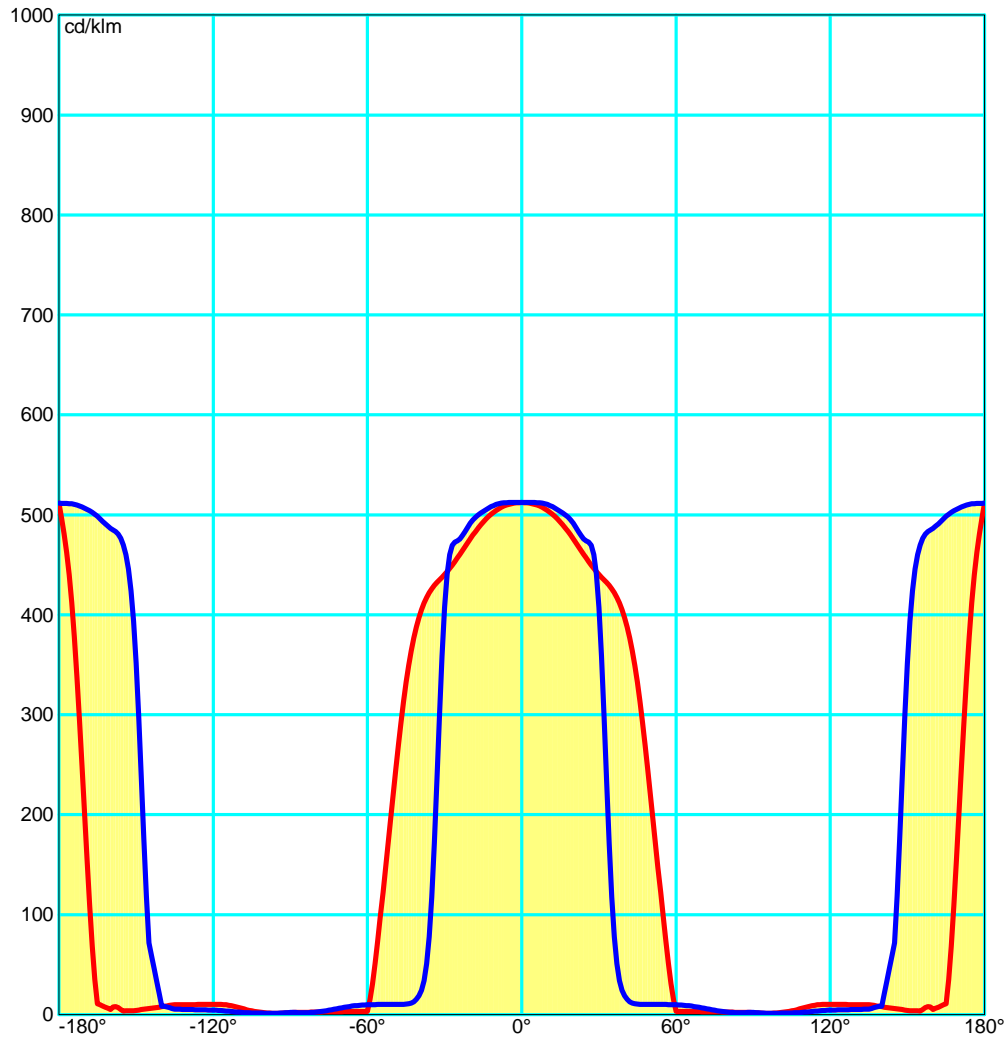




**Luminaire**  
 Code PX-0432-BLA  
 Name APLIQUE FORLIGHT LEDS  
**Measur.**  
 Code PX-0432-ANT  
 Name APLIQUE FORLIGHT LEDS

Luminaire Flux	243.97 lm	Luminaire Power	6.64 W	Efficacy	36.74 lm/W	Efficiency	100.00%
Lamps Flux	243.97 lm	Maximum value	512.34 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Luminance

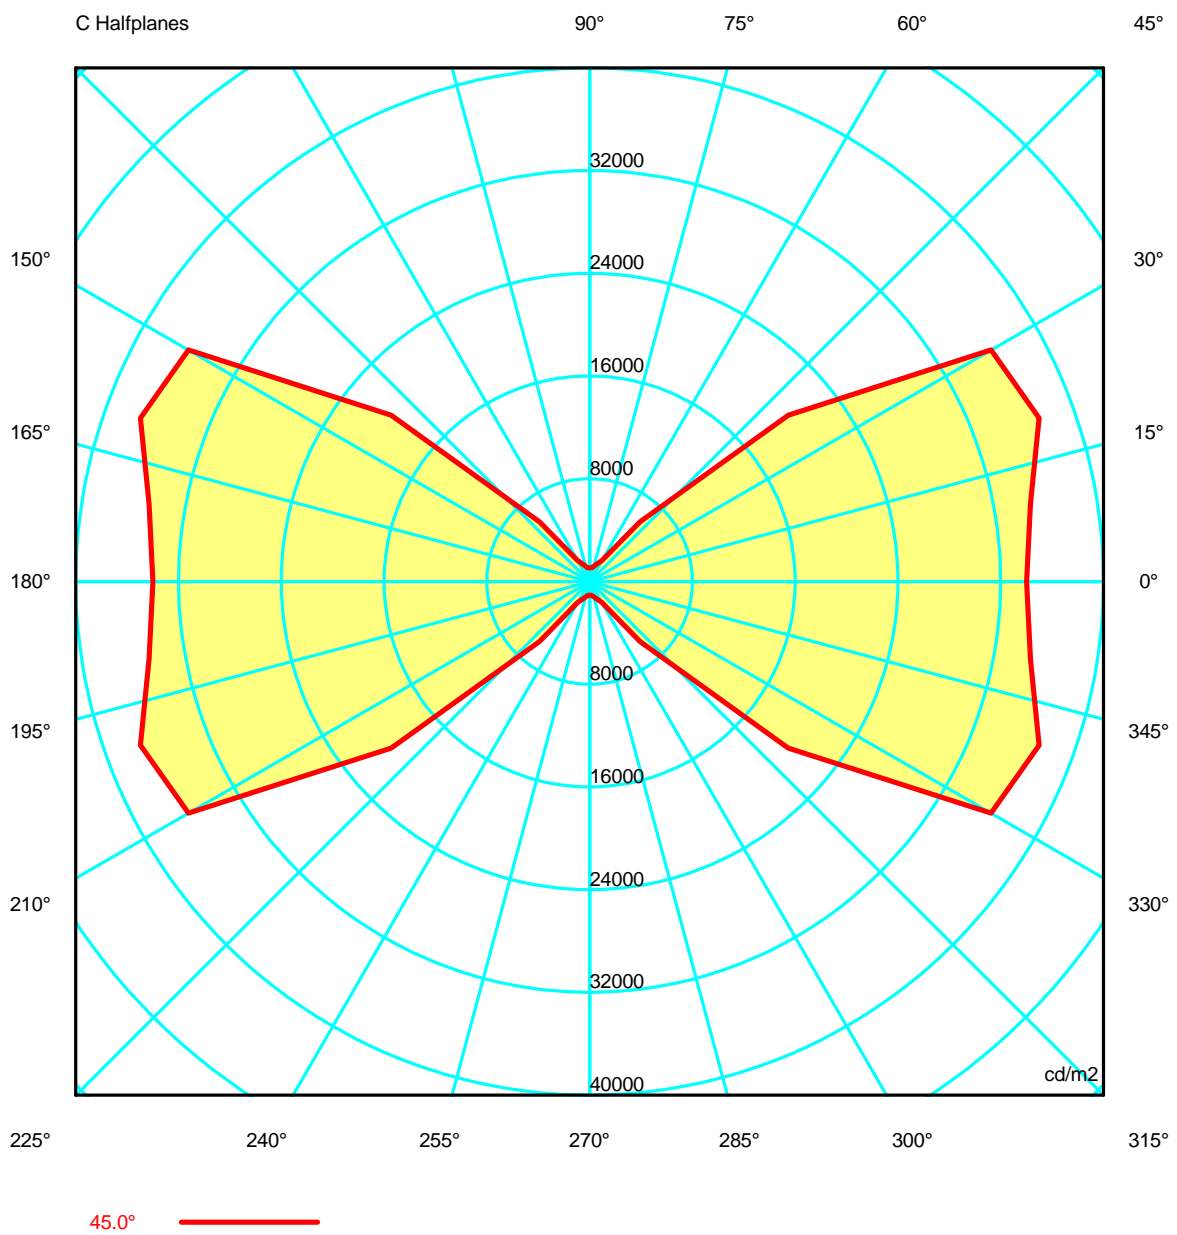



**Luminaire**

Code PX-0432-BLA  
Name APLIQUE FORLIGHT LEDS

**Measur.**

Code PX-0432-ANT  
Name APLIQUE FORLIGHT LEDS

Luminaire Flux	243.97 lm	Luminaire Power	6.64 W	Efficacy	36.74 lm/W	Efficiency	100.00%
Lamps Flux	243.97 lm	Maximum value	512.34 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

**Luminance cd/m2 Table 1/3**

	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00
G 0.0	37035.81	37035.81	37035.81	37035.81	37035.81	37035.81	37035.81	37035.81	37035.81	37035.81	37035.81	37035.81	37035.81
G 5.0	37044.94	37049.23	37060.16	37078.66	37100.44	37122.63	37142.82	37158.68	37167.96	37172.12	37167.96	37158.68	37142.82
G 10.0	37021.47	37049.17	37106.41	37189.39	37267.64	37335.83	37391.67	37430.18	37450.27	37458.05	37450.27	37430.18	37391.67
G 15.0	36883.64	36960.19	37078.43	37228.88	37362.79	37476.26	37569.39	37634.62	37665.40	37671.07	37665.40	37634.62	37569.39
G 20.0	36605.84	36728.85	36881.60	37076.44	37309.75	37579.04	37802.29	37865.25	37842.64	37804.13	37842.64	37865.25	37802.29
G 25.0	36437.52	36541.24	36677.49	36875.18	37144.59	37433.83	37627.87	37632.22	37663.65	37790.68	37663.65	37632.22	37627.87
G 30.0	36740.62	36781.15	36772.40	36742.22	36803.52	37081.33	37188.25	36475.45	35295.64	34008.33	35295.64	36475.45	37188.25
G 35.0	37586.42	37721.74	37368.02	36895.91	37049.92	36181.93	30441.13	19444.73	11895.28	10353.48	11895.28	19444.73	30441.13
G 40.0	37474.83	37739.82	37936.54	37489.55	34279.06	22551.17	7861.78	3220.62	2849.14	1766.86	2849.14	3220.62	7861.78
G 45.0	33992.78	34828.41	37223.93	36068.17	20170.30	6087.57	1882.24	1396.47	1122.12	1059.20	1122.12	1396.47	1882.24
G 50.0	24925.04	25772.62	29355.64	27727.60	10610.61	2246.13	1132.15	1134.66	1138.92	1144.93	1138.92	1134.66	1132.15
G 55.0	12266.34	13853.05	15903.36	14434.38	5187.19	1211.31	1218.12	1237.21	1255.08	1271.72	1255.08	1237.21	1218.12
G 60.0	468.92	1623.19	3238.75	4022.10	2212.69	1305.50	1334.75	1360.70	1384.71	1406.76	1384.71	1360.70	1334.75
G 65.0	529.09	639.65	755.59	887.18	1049.71	1255.77	1436.59	1471.25	1491.30	1496.77	1491.30	1471.25	1436.59
G 70.0	622.04	714.97	820.12	938.83	1074.61	1276.28	1457.71	1442.81	1432.03	1425.38	1432.03	1442.81	1457.71
G 75.0	780.07	842.24	919.28	1020.29	1146.67	1290.16	1395.60	1389.85	1305.25	1187.86	1305.25	1389.85	1395.60
G 80.0	1050.16	1109.66	1191.09	1279.70	1342.34	1414.05	1467.76	1415.86	1248.04	1006.13	1248.04	1415.86	1467.76
G 85.0	1868.14	1926.16	2015.25	2096.90	2093.22	2105.64	2134.14	2181.42	1995.77	1558.04	1995.77	2181.42	2134.14
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00



**Luminaire**

Code PX-0432-BLA  
Name APLIQUE FORLIGHT LEDS

**Measur.**

Code PX-0432-ANT  
Name APLIQUE FORLIGHT LEDS

Luminaire Flux	243.97 lm	Luminaire Power	6.64 W	Efficacy	36.74 lm/W	Efficiency	100.00%
Lamps Flux	243.97 lm	Maximum value	512.34 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

**Luminance cd/m2 Table 2/3**

	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00
G 0.0	37035.81	37035.81	37035.81	37035.81	37035.81	37035.81	37035.81	37035.81	37035.81	37035.81	37035.81	37035.81	37035.81
G 5.0	37122.63	37100.44	37078.66	37060.16	37049.23	37044.94	37049.23	37060.16	37078.66	37100.44	37122.63	37142.82	37158.68
G 10.0	37335.83	37267.64	37189.39	37106.41	37049.17	37021.47	37049.17	37106.41	37189.39	37267.64	37335.83	37391.67	37430.18
G 15.0	37476.26	37362.79	37228.88	37078.43	36960.19	36883.64	36960.19	37078.43	37228.88	37362.79	37476.26	37569.39	37634.62
G 20.0	37579.04	37309.75	37076.44	36881.60	36728.85	36605.84	36728.85	36881.60	37076.44	37309.75	37579.04	37802.29	37865.25
G 25.0	37433.83	37144.59	36875.18	36677.49	36541.24	36437.52	36541.24	36677.49	36875.18	37144.59	37433.83	37627.87	37632.22
G 30.0	37081.33	36803.52	36742.22	36772.40	36781.15	36740.62	36781.15	36772.40	36742.22	36803.52	37081.33	37188.25	36475.45
G 35.0	36181.93	37049.92	36895.91	37368.02	37721.74	37586.42	37721.74	37368.02	36895.91	37049.92	36181.93	30441.13	19444.73
G 40.0	22551.17	34279.06	37489.55	37936.54	37739.82	37474.83	37739.82	37936.54	37489.55	34279.06	22551.17	7861.78	3220.62
G 45.0	6087.57	20170.30	36068.17	37223.93	34828.41	33992.78	34828.41	37223.93	36068.17	20170.30	6087.57	1882.24	1396.47
G 50.0	2246.13	10610.61	27727.60	29355.64	25772.62	24925.04	25772.62	29355.64	27727.60	10610.61	2246.13	1132.15	1134.66
G 55.0	1211.31	5187.19	14434.38	15903.36	13853.05	12266.34	13853.05	15903.36	14434.38	5187.19	1211.31	1218.12	1237.21
G 60.0	1305.50	2212.69	4022.10	3238.75	1623.19	468.92	1623.19	3238.75	4022.10	2212.69	1305.50	1334.75	1360.70
G 65.0	1255.77	1049.71	887.18	755.59	639.65	529.09	639.65	755.59	887.18	1049.71	1255.77	1436.59	1471.25
G 70.0	1276.28	1074.61	938.83	820.12	714.97	622.04	714.97	820.12	938.83	1074.61	1276.28	1457.71	1442.81
G 75.0	1290.16	1146.67	1020.29	919.28	842.24	780.07	842.24	919.28	1020.29	1146.67	1290.16	1395.60	1389.85
G 80.0	1414.05	1342.34	1279.70	1191.09	1109.66	1050.16	1109.66	1191.09	1279.70	1342.34	1414.05	1467.76	1415.86
G 85.0	2105.64	2093.22	2096.90	2015.25	1926.16	1868.14	1926.16	2015.25	2096.90	2093.22	2105.64	2134.14	2181.42
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00



**Luminaire**

Code PX-0432-BLA  
Name APLIQUE FORLIGHT LEDS

**Measur.**

Code PX-0432-ANT  
Name APLIQUE FORLIGHT LEDS

Luminaire Flux	243.97 lm	Luminaire Power	6.64 W	Efficacy	36.74 lm/W	Efficiency	100.00%
Lamps Flux	243.97 lm	Maximum value	512.34 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

**Luminance cd/m2 Table 3/3**


	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00
G 0.0	37035.81	37035.81	37035.81	37035.81	37035.81	37035.81	37035.81	37035.81	37035.81	37035.81
G 5.0	37167.96	37172.12	37167.96	37158.68	37142.82	37122.63	37100.44	37078.66	37060.16	37049.23
G 10.0	37450.27	37458.05	37450.27	37430.18	37391.67	37335.83	37267.64	37189.39	37106.41	37049.17
G 15.0	37665.40	37671.07	37665.40	37634.62	37569.39	37476.26	37362.79	37228.88	37078.43	36960.19
G 20.0	37842.64	37804.13	37842.64	37865.25	37802.29	37579.04	37309.75	37076.44	36881.60	36728.85
G 25.0	37663.65	37790.68	37663.65	37632.22	37627.87	37433.83	37144.59	36875.18	36677.49	36541.24
G 30.0	35295.64	34008.33	35295.64	36475.45	37188.25	37081.33	36803.52	36742.22	36772.40	36781.15
G 35.0	11895.28	10353.48	11895.28	19444.73	30441.13	36181.93	37049.92	36895.91	37368.02	37721.74
G 40.0	2849.14	1766.86	2849.14	3220.62	7861.78	22551.17	34279.06	37489.55	37936.54	37739.82
G 45.0	1122.12	1059.20	1122.12	1396.47	1882.24	6087.57	20170.30	36068.17	37223.93	34828.41
G 50.0	1138.92	1144.93	1138.92	1134.66	1132.15	2246.13	10610.61	27727.60	29355.64	25772.62
G 55.0	1255.08	1271.72	1255.08	1237.21	1218.12	1211.31	5187.19	14434.38	15903.36	13853.05
G 60.0	1384.71	1406.76	1384.71	1360.70	1334.75	1305.50	2212.69	4022.10	3238.75	1623.19
G 65.0	1491.30	1496.77	1491.30	1471.25	1436.59	1255.77	1049.71	887.18	755.59	639.65
G 70.0	1432.03	1425.38	1432.03	1442.81	1457.71	1276.28	1074.61	938.83	820.12	714.97
G 75.0	1305.25	1187.86	1305.25	1389.85	1395.60	1290.16	1146.67	1020.29	919.28	842.24
G 80.0	1248.04	1006.13	1248.04	1415.86	1467.76	1414.05	1342.34	1279.70	1191.09	1109.66
G 85.0	1995.77	1558.04	1995.77	2181.42	2134.14	2105.64	2093.22	2096.90	2015.25	1926.16
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

**Luminaire**  
 Code PX-0432-BLA  
 Name APLIQUE FORLIGHT LEDS  
**Measur.**  
 Code PX-0432-ANT  
 Name APLIQUE FORLIGHT LEDS

Luminaire Flux	243.97 lm	Luminaire Power	6.64 W	Efficacy	36.74 lm/W	Efficiency	100.00%
Lamps Flux	243.97 lm	Maximum value	512.34 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

PERCENTAGE ISOCANDLES

Projection: SLI 10.9 Tight Tilting Angle:0°

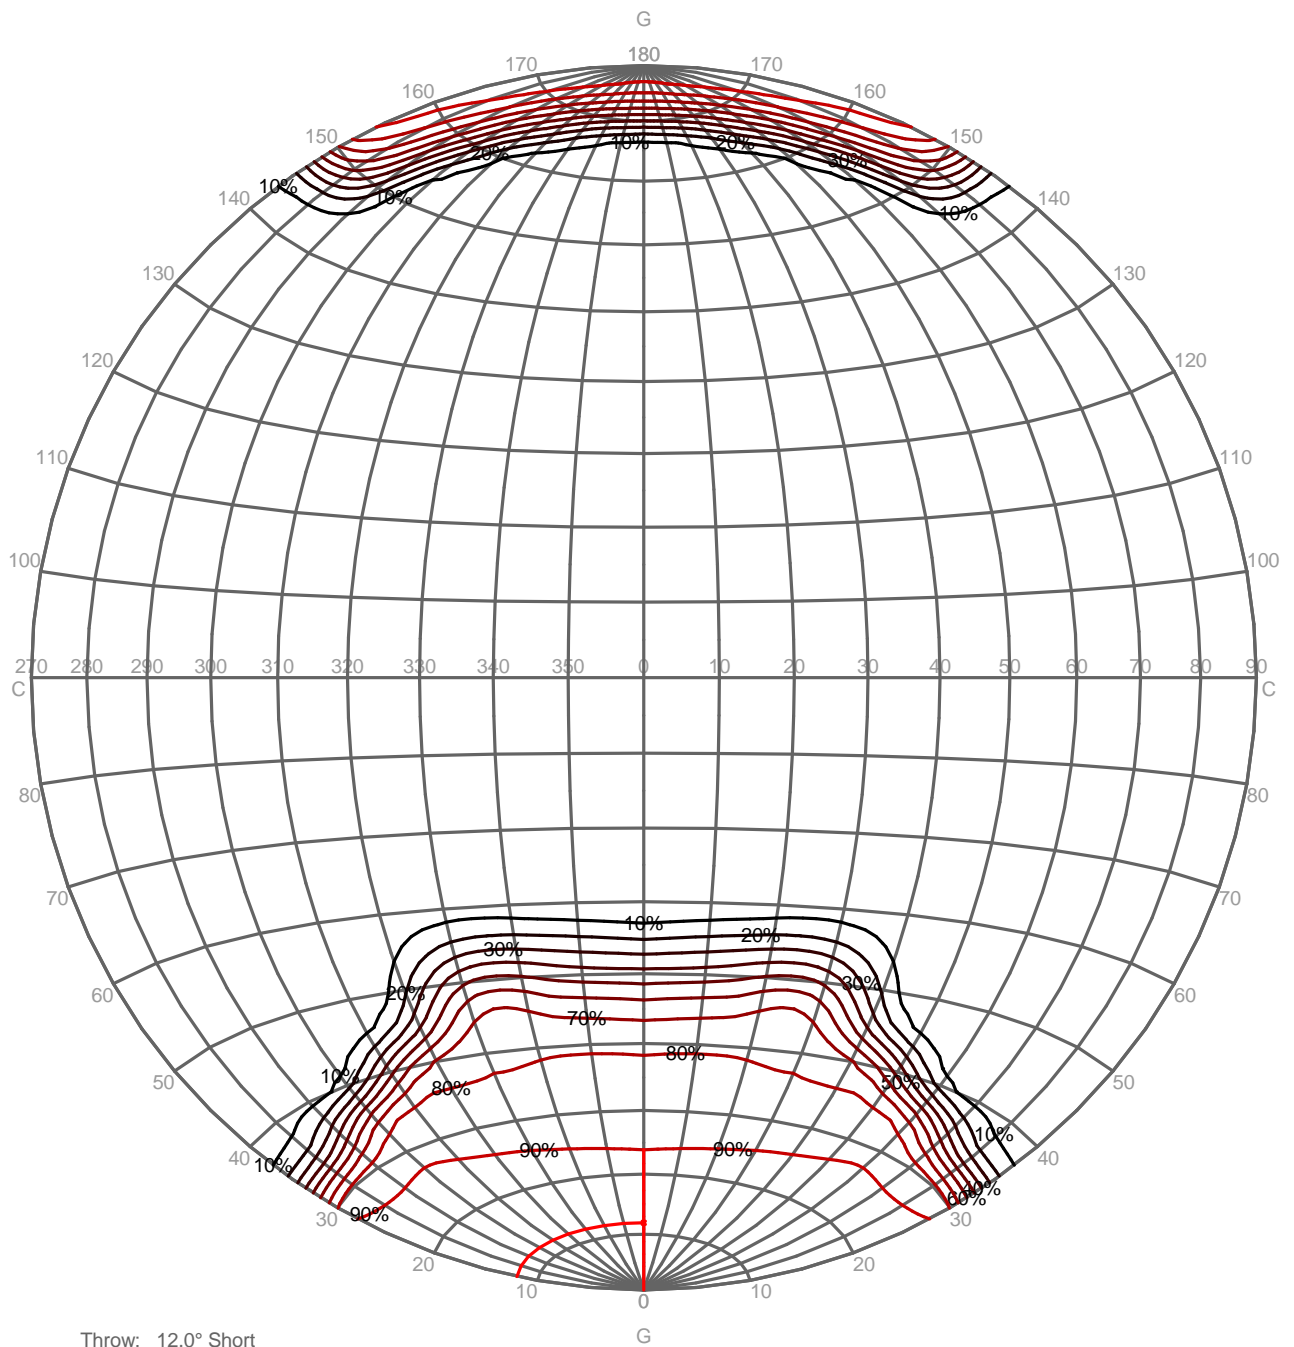


**Luminaire**  
 Code PX-0432-BLA  
 Name APLIQUE FORLIGHT LEDS  
**Measur.**  
 Code PX-0432-ANT  
 Name APLIQUE FORLIGHT LEDS

Luminaire Flux	243.97 lm	Luminaire Power	6.64 W	Efficacy	36.74 lm/W	Efficiency	100.00%
Lamps Flux	243.97 lm	Maximum value	512.34 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

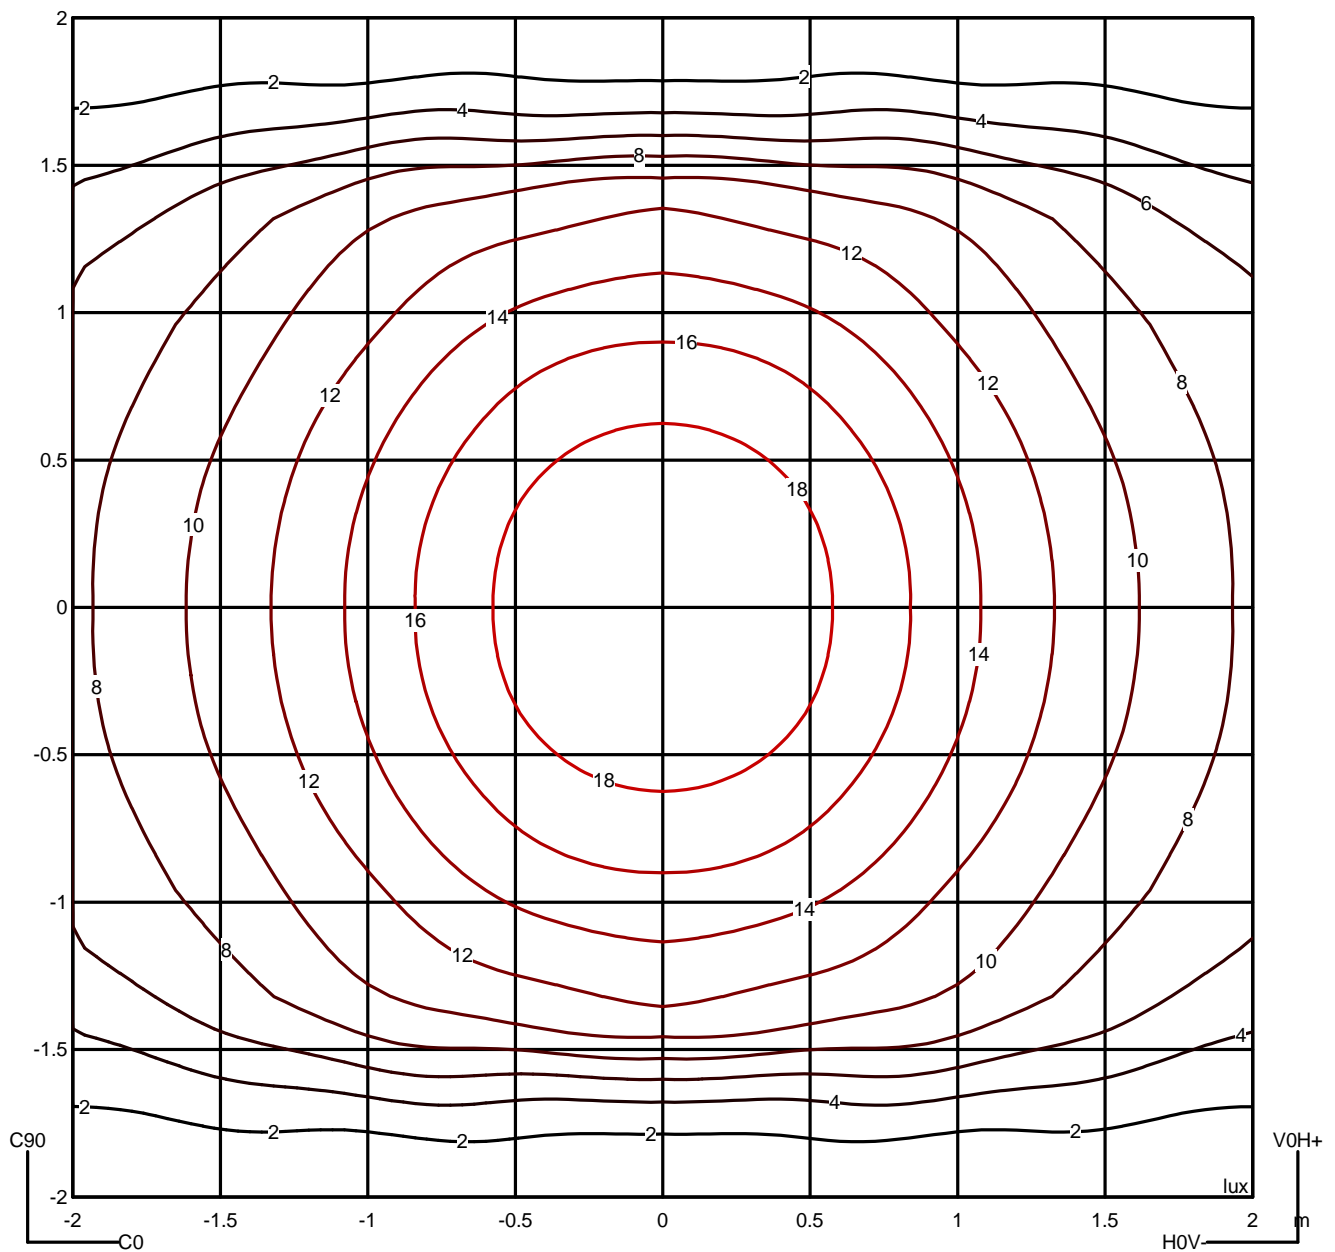

**Luminaire**

Code PX-0432-BLA  
Name APLIQUE FORLIGHT LEDS


**Measur.**


Code PX-0432-ANT  
Name APLIQUE FORLIGHT LEDS

Luminaire Flux	243.97 lm	Luminaire Power	6.64 W	Efficacy	36.74 lm/W	Efficiency	100.00%
Lamps Flux	243.97 lm	Maximum value	512.34 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical


Average Luminance [cd/m²]										
0.0°	45°	50°	55°	60°	65°	70°	75°	80°	85°	---
33993	24925	12266	469	529	622	780	1050	1868	---	---
90.0°	1059	1145	1272	1407	1497	1425	1188	1006	1558	---

Flush mounted or longitudinal view												
		Illumination(lx)										
A	A	2000	1000	750	500		<300					1.15
B	1		2000	1500	1000	750	500	<300				1.5
C					2000		1000	500	<300			1.85
D	2						2000	1000	500	<300		2.2
E	3							2000	1000	500	<300	2.55

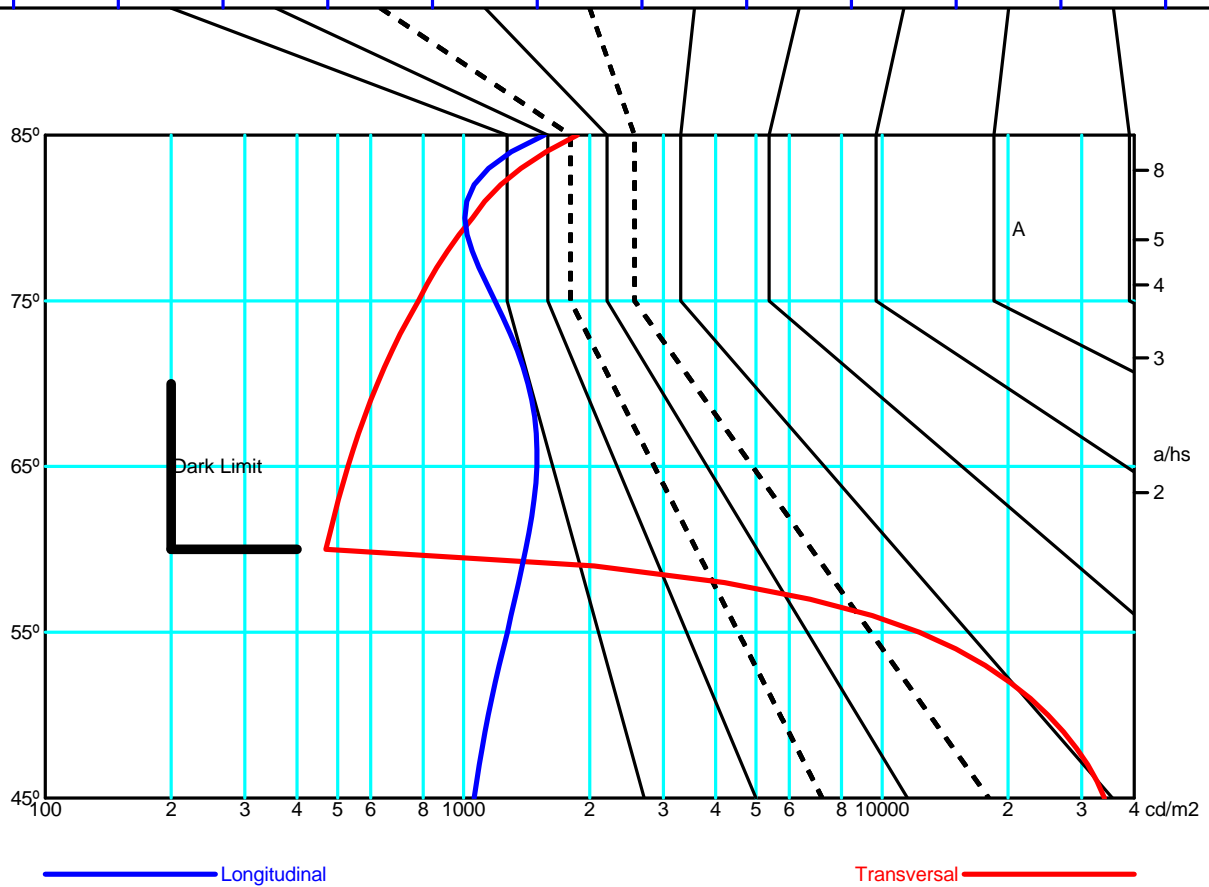


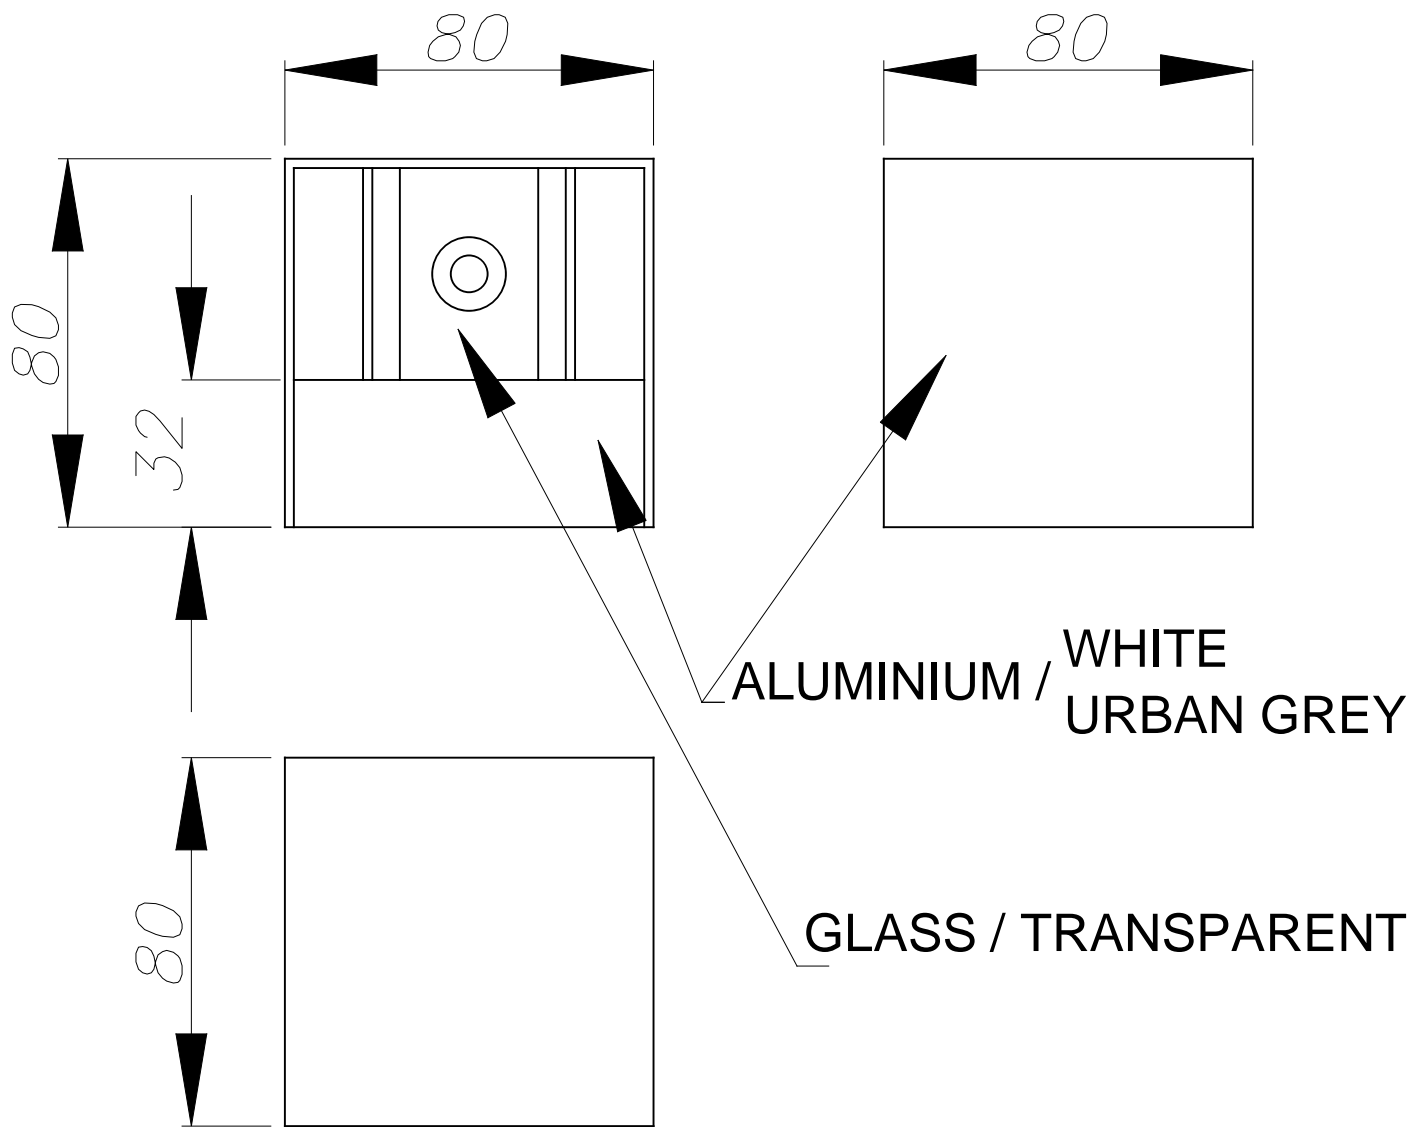

PLANTILLA DE INSTALACIÓN  
INSTALLATION TEMPLATE

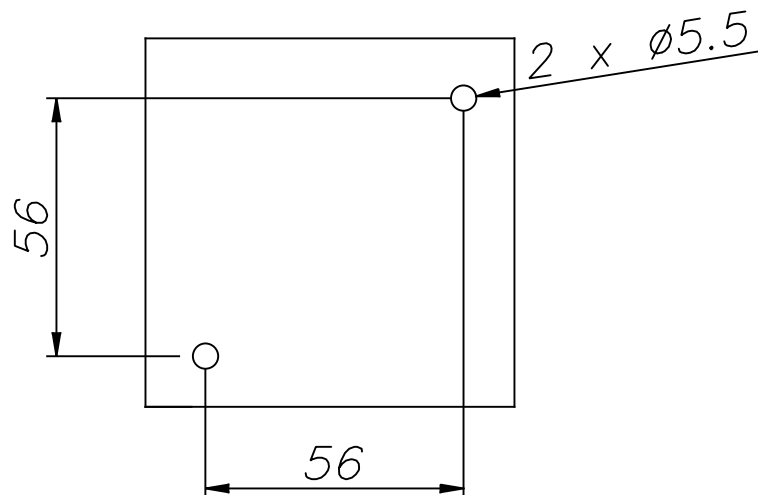





# Rex

PX-0432 PX-0526

# FOR LIGHT

