

# Industrial plugs and receptacles



International  
Wiring  
Devices

# Global focus



MENNEKES plugs and receptacles are well known all over the world – and comply with the relevant national and international standards.

More than half of our products are destined for international markets.

This is why MENNEKES also has a global presence, with subsidiaries and agencies in more than 90 countries.

When plugs and receptacles are being tested by independent testing authorities, such as the VDE Testing and Certification Institute, the test reports are compiled according to CCA or CB-II procedures. They then serve as the basis for approvals in other countries, such as those whose national test marks are shown below.

For plugs and receptacles for USA and Canada please contact us.





# Family business

MENNEKES is a family-run business - like most of our customers' companies.

Perhaps this is also the reason behind our legendary customer focus. At MENNEKES, an 800-strong global workforce produces plugs and receptacles for international markets. From its headquarters in Kirchhundem, Germany and its Neudorf plant in the Erzgebirge. In addition, a production plant in Nanjing supplies the Chinese market exclusively.

The North American market is serviced by MENNEKES Electrical Products headquartered in Fairfield, NJ.




Neudorf plant



Kirchhundem headquarters

When a MENNEKES product leaves our factory, it has already survived the harshest testing. In our test lab it is exposed to cold, heat, dust and water over and over again. Only the products that withstand these tests are worthy of the name MENNEKES. Our products are of course certified to national and international standards by renowned institutions.

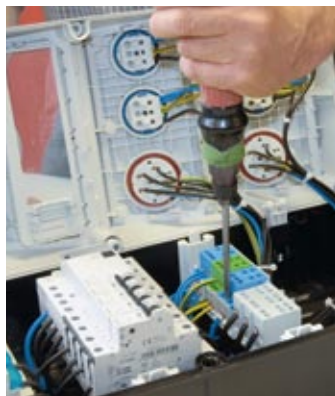

Only the combination of first-class raw materials and advanced manufacturing processes guarantees a premium product. This is why we use only first-grade granules which are processed by a highly skilled workforce in state-of-the-art production facilities to create certified MENNEKES products.

# CEE receptacles 16A up to 125A

63A: SoftCONTACT, 125A: TorsionSpringCONTACT

Other voltages and frequencies available on request.

## Wall mounted receptacles



▲ IP 44

A	P	110V	230V	400V
16	3	1177	1178	—
16	4	—	1267	1268
16	5	—	—	1
32	3	1368	1369	—
32	4	1371	1372	1373
32	5	—	—	2

## Wall mounted receptacles



▲ IP 44

A	P	110V	230V	400V
16	3	—	—	—
16	4	3030	3034	1418
16	5	3041	3045	1419
32	3	1420	1421	1422
32	4	1423	1424	1425
32	5	1555	1556	1557

## Wall mounted receptacles



▲▲ IP 67

A	P	110V	230V	400V
16	3	1193	1192	1211
16	4	1194	1195	1196
16	5	1198	1199	1200
32	3	1201	1202	1203
32	4	1204	1205	1206
32	5	1208	1209	1210

## Wall mounted receptacles



▲▲ IP 67

A	P	110V	230V	400V
63	3	—	—	—
63	4	—	—	—
63	5	—	—	—
125	3	—	—	—
125	4	137	138	139
125	5	141	142	143

## Panel mounted receptacles

straight



▲ IP 44

A	P	110V	230V	400V
16	3	1365	1366	1367
16	4	1388	1389	1390
16	5	1384	1386	1385
32	3	1394	1395	1396
32	4	1397	1398	1399
32	5	3449	3454	3451

## Panel mounted receptacles

angled 20°



▲ IP 44

A	P	110V	230V	400V
16	3	1462	1463	1464
16	4	1465	1466	1467
16	5	1471	1472	1473
32	3	1491	1492	1493
32	4	1494	1495	1496
32	5	1498	1499	1500

## Panel mounted receptacles

straight



▲ IP 44

A	P	110V	230V	400V
63	3	1260	1261	1262
63	4	1246	1247	1248
63	5	1250	1251	1252
125	3	—	—	—
125	4	—	—	—
125	5	—	—	—

## Panel mounted receptacles

angled 20°



▲ IP 44

A	P	110V	230V	400V
63	3	1146	1147	1148
63	4	1149	1150	1151
63	5	1153	1154	1155
125	3	—	—	—
125	4	—	—	—
125	5	—	—	—

## Panel mounted receptacles with standard flange dimensions



▲ IP 44

angled 20°,  
flange:  
85 x 85 mm,  
fixing hole spacing:  
70 x 70 mm

A	P	110V	230V	400V
16	3	3031	3036	—
16	4	—	—	3072
16	5	—	—	3093
32	3	3110	3112	—
32	4	—	—	3136
32	5	—	—	3153

## Wall mounted receptacles



▲ IP 44

A	P	110V	230V	400V
16	3	100	101	102
16	4	103	104	105
16	5	109	110	111
32	3	—	—	—
32	4	—	—	—
32	5	—	—	—

## Wall mounted receptacles



▲ IP 44

A	P	110V	230V	400V
63	3	1136	1137	1138
63	4	1139	1140	1141
63	5	1143	1144	1145
125	3	—	—	—
125	4	—	—	—
125	5	—	—	—

## Wall mounted receptacles



▲▲ IP 67

A	P	110V	230V	400V
63	3	856	128	129
63	4	130	131	132
63	5	134	135	136
125	3	—	—	—
125	4	—	—	—
125	5	—	—	—

## Wall mounted receptacles



▲▲ IP 67

with large  
space for  
accommodating  
wiring

A	P	110V	230V	400V
63	3	—	—	—
63	4	—	—	—
63	5	—	—	—
125	3	—	—	—
125	4	—	—	—
125	5	—	—	2162

## Panel mounted receptacles

straight



▲▲ IP 67

A	P	110V	230V	400V
16	3	217	218	219
16	4	220	221	222
16	5	226	227	228
32	3	229	230	231
32	4	232	233	234
32	5	238	239	240

## Panel mounted receptacles

angled 20°



▲▲ IP 67

A	P	110V	230V	400V
16	3	1474	1475	1476
16	4	1477	1478	1479
16	5	1483	1484	1485
32	3	1501	1502	1503
32	4	1504	1505	1506
32	5	1489	1490	1551

## Panel mounted receptacles

straight



▲▲ IP 67

A	P	110V	230V	400V
63	3	1263	1264	1265
63	4	1122	1123	1124
63	5	1126	1127	1128
125	3	—	3380	—
125	4	1455	1456	1457
125	5	1459	1460	1461

## Panel mounted receptacles

angled 20°



▲▲ IP 67

A	P	110V	230V	400V
63	3	2179	2180	2181
63	4	203	204	205
63	5	207	208	209
125	3	—	3575	—
125	4	210	211	212
125	5	214	215	216

## Panel mounted receptacles with standard flange dimensions



▲▲ IP 67

angled 20°,  
flange:  
85 x 85 mm,  
fixing hole spacing:  
70 x 70 mm

A	P	110V	230V	400V
16	3	903	905	—
16	4	—	—	1081
16	5	—	—	1103
32	3	3197	3200	—
32	4	—	—	3254
32	5	—	—	3524

# CEE receptacles 16A and 32A, screwless connection technique

Other voltages and frequencies available on request.



Plugs for the world

## Wall mounted receptacles with TwinCONTACT



screwless spring terminals

A	P	110V	230V	400V
16	3	1340	<b>1341</b>	—
16	4	—	1342	<b>1343</b>
16	5	—	—	<b>31</b>
32	3	1345	<b>1346</b>	—
32	4	—	1347	<b>1348</b>
32	5	—	—	<b>32</b>

⚠ IP 44

## Wall mounted receptacles with TwinCONTACT



screwless spring terminals

A	P	110V	230V	400V
16	3	—	—	—
16	4	1750	1751	<b>418</b>
16	5	1755	1756	<b>419</b>
32	3	1851	<b>420</b>	1852
32	4	1855	1856	<b>421</b>
32	5	1860	1861	<b>422</b>

⚠ IP 44

## Panel mounted receptacles with TwinCONTACT



screwless spring terminals, straight

A	P	110V	230V	400V
16	3	1667	<b>1668</b>	1669
16	4	1672	1673	<b>1674</b>
16	5	1678	1679	<b>3385</b>
32	3	1786	<b>1787</b>	1788
32	4	1789	1790	<b>1791</b>
32	5	1795	1796	<b>1797</b>

⚠ IP 44

## Panel mounted receptacles with TwinCONTACT



screwless spring terminals, angled 20°

A	P	110V	230V	400V
16	3	1631	<b>1632</b>	1633
16	4	1636	1637	<b>1638</b>
16	5	1642	1643	<b>3473</b>
32	3	1733	<b>1734</b>	1735
32	4	1738	1739	<b>1740</b>
32	5	1744	1745	<b>1746</b>

⚠ IP 44

## Panel mounted receptacles RAPIDO with TwinCONTACT



screwless spring terminals, central fixing, 61 mm Ø mounting hole

A	P	110V	230V	400V
16	3	1132	<b>997</b>	—
16	4	—	—	—
16	5	—	—	—
32	3	—	—	—
32	4	—	—	—
32	5	—	—	—

⚠ IP 44

## Wall mounted receptacles with TwinCONTACT



screwless spring terminals

A	P	110V	230V	400V
16	3	1719	<b>1720</b>	1721
16	4	—	1723	<b>1724</b>
16	5	—	1730	<b>3331</b>
32	3	—	—	—
32	4	—	—	—
32	5	—	—	—

⚠ IP 44

## Wall mounted receptacles with TwinCONTACT



screwless spring terminals

A	P	110V	230V	400V
16	3	1867	<b>241</b>	1868
16	4	1870	1871	<b>242</b>
16	5	1875	1876	<b>200</b>
32	3	1877	<b>243</b>	1878
32	4	1879	1880	<b>244</b>
32	5	1884	1885	<b>245</b>

⚠ IP 67

## Panel mounted receptacles with TwinCONTACT



screwless spring terminals, straight

A	P	110V	230V	400V
16	3	1707	<b>1708</b>	1709
16	4	1710	1711	<b>1712</b>
16	5	1716	1717	<b>1131</b>
32	3	1809	<b>1810</b>	1811
32	4	1812	1813	<b>1814</b>
32	5	1818	1819	<b>1820</b>

⚠ IP 67

## Panel mounted receptacles with TwinCONTACT



screwless spring terminals, angled 20°

A	P	110V	230V	400V
16	3	1700	<b>1701</b>	1702
16	4	—	1703	<b>1704</b>
16	5	—	—	<b>3485</b>
32	3	1801	<b>1802</b>	1803
32	4	—	1804	<b>1805</b>
32	5	—	—	<b>1808</b>

⚠ IP 67

## Panel mounted receptacles RAPIDO with TwinCONTACT




screwless spring terminals, central fixing, 70 mm Ø mounting hole

A	P	110V	230V	400V
16	3	—	—	—
16	4	—	1133	<b>998</b>
16	5	—	—	<b>907</b>
32	3	1135	<b>987</b>	—
32	4	—	1166	<b>988</b>
32	5	—	—	<b>989</b>

⚠ IP 44

## TwinCONTACT Screwless connection technique

without screws, double terminal with split spring for throughwiring.

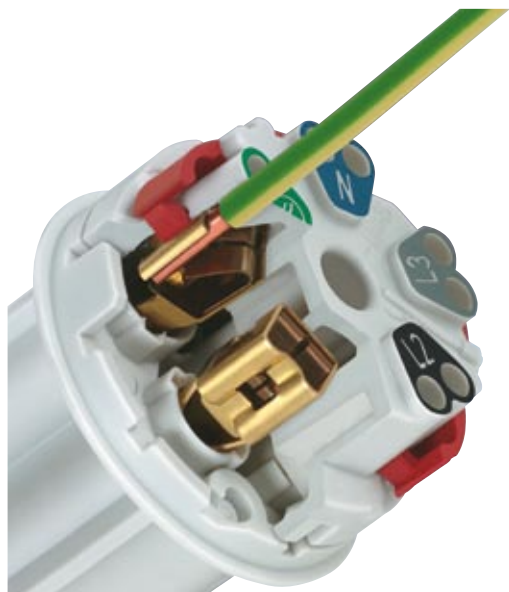

## RAPIDO

RAPIDO receptacles are available with screw terminals or with screwless TwinCONTACT.

16A, 3p:

for mounting holes 61 mm diam. and wall thickness from 2 up to 5 mm.

16A, 4p + 5p and 32A:

for mounting holes 70 mm diam. and wall thickness from 2 up to 9 mm.






# CEE plugs and inlets 16A up to 125A

Other voltages and frequencies available on request.

**Plugs AM-TOP**




single part body, screw terminals

A	P	110V	230V	400V
16	3	247	248	249
16	4	250	251	252
16	5	256	257	3
32	3	259	260	261
32	4	262	263	264
32	5	268	269	4

⚠ IP 44

**Plugs StarTOP with SafeCONTACT**




screwless with insulation displacement technique

A	P	110V	230V	400V
16	3	947	948	—
16	4	—	951	952
16	5	—	—	33
32	3	711	712	—
32	4	—	717	719
32	5	—	—	34

⚠ IP 44

**Plugs AM-TOP**




single part body, screw terminals

A	P	110V	230V	400V
16	3	277	278	279
16	4	280	281	282
16	5	286	287	288
32	3	289	290	291
32	4	292	293	294
32	5	298	299	300

⚠ IP 67

**Plugs PowerTOP Xtra**




with rubberized grip area, for toughest conditions

A	P	110V	230V	400V
63	3	13201	13202	13203
63	4	13204	13205	13206
63	5	13210	13211	13212
125	3	13215	13216	—
125	4	13217	13218	13219
125	5	13223	13224	13225

⚠ IP 67

**Panel mounted inlets RAPIDO**




with screw terminals, central fixing, 61 mm Ø mounting hole

A	P	110V	230V	400V
16	3	919	924	—
16	4	—	—	931
16	5	—	—	949
32	3	—	—	—
32	4	—	—	—
32	5	—	—	—

⚠ IP 44


**Wall mounted appliance inlets**



A	P	110V	230V	400V
16	3	843	844	—
16	4	—	—	800
16	5	—	—	801
32	3	—	802	—
32	4	—	—	803
32	5	—	—	804

⚠ IP 44

**Panel mounted appliance inlets**




with hinged lid

A	P	110V	230V	400V
16	3	—	—	—
16	4	392	393	394
16	5	398	399	400
32	3	401	402	403
32	4	404	405	406
32	5	410	411	412

⚠ IP 44

**Panel mounted inlets**



A	P	110V	230V	400V
16	3	810	812	—
16	4	—	837	813
16	5	—	—	815
32	3	816	817	—
32	4	—	838	819
32	5	—	—	821

⚠ IP 44


**Panel mounted inlets**



A	P	110V	230V	400V
16	3	825	826	—
16	4	—	839	827
16	5	—	—	829
32	3	830	831	—
32	4	—	840	832
32	5	—	—	834

⚠ IP 67

**Plugs ProTOP**




split body, screw terminals

A	P	110V	230V	400V
16	3	147	148	149
16	4	—	151	152
16	5	—	—	13
32	3	159	160	—
32	4	—	163	164
32	5	—	—	14

⚠ IP 44

**Plugs PowerTOP Xtra**



with rubberized grip area, for toughest conditions

A	P	110V	230V	400V
63	3	13101	13102	—
63	4	—	13105	13106
63	5	—	13111	13112
125	3	—	—	—
125	4	—	—	—
125	5	—	—	—

⚠ IP 44

**Plugs PowerTOP**



with external strain relief

A	P	110V	230V	400V
16	3	3794	3796	3799
16	4	3807	3811	3809
16	5	3819	3823	3821
32	3	3829	3830	3832
32	4	3839	3844	3841
32	5	3851	3855	3853

⚠ IP 67

**Angled plugs**




\*VarioTOP

A	P	110V	230V	400V
16	3	1410	1411	—
16	4	—	891	315
16	5	3312	3981*	3980*
32	3	—	3306	—
32	4	—	3646	3987
32	5	—	3424	3266

⚠ IP 44

**Panel mounted inlets RAPIDO**




with screw terminals, central fixing, 70 mm Ø mounting hole

A	P	110V	230V	400V
16	3	—	—	—
16	4	—	932	933
16	5	—	—	972
32	3	935	938	—
32	4	—	939	942
32	5	—	—	945

⚠ IP 44


**Wall mounted appliance inlets**



A	P	110V	230V	400V
16	3	331	332	333
16	4	334	335	336
16	5	340	341	342
32	3	343	344	345
32	4	346	347	348
32	5	352	353	354

⚠ IP 44


**Wall mounted appliance inlets**



A	P	110V	230V	400V
63	3	1216	1107	1217
63	4	355	356	357
63	5	359	360	361
125	3	—	—	—
125	4	362	363	364
125	5	366	367	368

⚠ IP 67


**Panel mounted inlets**



A	P	110V	230V	400V
63	3	822	1981	—
63	4	—	1984	1982
63	5	—	—	1688
125	3	—	—	—
125	4	—	—	—
125	5	—	—	—

⚠ IP 44

**Panel mounted inlets**



A	P	110V	230V	400V
63	3	835	836	—
63	4	—	3704	3656
63	5	—	—	3658
125	3	—	3665	—
125	4	—	3413	3583
125	5	—	—	1983

⚠ IP 67

# CEE connectors 16A up to 125A

63A: SoftCONTACT, 125A: TorsionSpringCONTACT

Other voltages and frequencies available on request.



Plugs for the world

**Connectors AM-TOP**

single part body, screw terminals

A	P	110V	230V	400V
16	3	509	510	511
16	4	512	513	514
16	5	518	519	5
32	3	521	522	523
32	4	524	525	526
32	5	530	531	6

⚠ IP 44

**Connectors StarTOP with SafeCONTACT**

screwless with insulation displacement technique

A	P	110V	230V	400V
16	3	979	980	—
16	4	—	993	994
16	5	—	—	35
32	3	725	731	—
32	4	—	761	763
32	5	—	—	36

⚠ IP 44

**Connectors AM-TOP**

single part body, screw terminals

A	P	110V	230V	400V
16	3	539	540	541
16	4	542	543	544
16	5	548	549	550
32	3	551	552	553
32	4	554	555	556
32	5	560	561	562

⚠ IP 67

**Connectors PowerTOP Xtra**

with rubberized grip area, for toughest conditions

A	P	110V	230V	400V
63	3	14201	14202	14203
63	4	14204	14205	14206
63	5	14210	14211	14212
125	3	14215	14216	—
125	4	14217	14218	14219
125	5	14223	14224	14225

⚠ IP 67

**Connectors ProTOP**

split body, screw terminals

A	P	110V	230V	400V
16	3	179	180	181
16	4	—	193	194
16	5	—	—	15
32	3	121	122	—
32	4	—	125	126
32	5	—	—	16

⚠ IP 44

**Connectors PowerTOP Xtra**

with rubberized grip area, for toughest conditions

A	P	110V	230V	400V
63	3	14101	14102	—
63	4	—	14105	14106
63	5	—	14111	14112
125	3	—	—	—
125	4	—	—	—
125	5	—	—	—

⚠ IP 44

**Connectors PowerTOP**

with external strain relief

A	P	110V	230V	400V
16	3	3859	3860	3862
16	4	3869	3873	3871
16	5	3879	3883	3881
32	3	3887	3888	3891
32	4	3896	3899	3897
32	5	3905	3909	3907

⚠ IP 67

**Angled connector**

A	P	110V	230V	400V
16	3	—	1438	—
16	4	—	—	—
16	5	—	—	—
32	3	—	—	—
32	4	—	—	—
32	5	—	—	—

⚠ IP 44

## PowerTOP Xtra



**PowerTOP Xtra** is rubberized for the best grip. Improved impact resistance even under humid conditions. Highly heat-resistant contact carrier, frame terminals, cable gland and sealing, strain relief and protection against kinking. Enclosure with thread lock, two safety slides and plugs with nickel-plated contacts. Connectors 63A with **SoftCONTACT** and 125A with **TorsionSpringCONTACT**.

SoftCONTACT




TorsionSpringCONTACT



## StarTOP



with SafeCONTACT, screwless with insulation displacement technique, cable gland with sealing, strain relief and protection against kinking, 2-part enclosure with thread and locking slider.

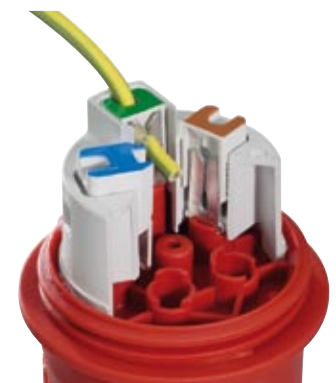

# CEE receptacles switched, interlocked, 16A up to 125A

63A: SoftCONTACT, 125A: TorsionSpringCONTACT. CEE receptacles with DUO-interlock can be padlocked.

Other voltages and frequencies available on request.

## Wall mounted receptacles with mechanical DUO-interlock



⚠ IP 44

A	P	110V	230V	400V
16	3	7010	7002	—
16	4	5457	5099	5100
16	5	5459	5102	5103
32	3	5743	5696	—
32	4	5460	5104	5105
32	5	5462	5107	5108

## Wall mounted receptacles with mechanical DUO-interlock



⚠ IP 44

A	P	110V	230V	400V
63	3	6569	6571	—
63	4	—	5955	5956
63	5	—	—	5959
125	3	—	—	—
125	4	—	—	—
125	5	—	—	—

## Wall mounted receptacles with mechanical DUO-interlock



⚠ IP 44

A	P	110V	230V	400V
16	3	7602	7603	—
16	4	—	7604	7605
16	5	—	—	7607
32	3	7611	7612	—
32	4	—	7613	7614
32	5	—	—	7616

## Panel mounted receptacles with mechanical DUO-interlock



⚠ IP 44

A	P	110V	230V	400V
16	3	7502	7503	—
16	4	—	7504	7505
16	5	—	—	7507
32	3	7511	7512	—
32	4	—	7513	7514
32	5	—	—	7516

## Wall mounted receptacles with mechanical DUO-interlock



⚠ IP 44

fused,  
DIN-rail

A	P	110V	230V	400V
16	3	—	7213	—
16	4	—	—	5610
16	5	—	—	5613
32	4	—	—	5615
32	5	—	—	5618
63	4	—	—	6059
63	5	—	—	6062

## Wall mounted receptacles with mechanical DUO-interlock



⚠ IP 44

fused,  
MCB

A	P	110V	230V	400V
16	3	—	7216	—
16	4	—	—	7217
16	5	—	—	7218
32	4	—	—	7219
32	5	—	—	7220
63	4	—	—	7221
63	5	—	—	7222

## Wall mounted receptacles with mechanical DUO-interlock



⚠ IP 67

A	P	110V	230V	400V
16	3	7011	7012	—
16	4	—	5599	5600
16	5	—	5602	5603
32	3	5924	5793	—
32	4	—	5604	5605
32	5	—	5607	5608

## Wall mounted receptacles with mechanical DUO-interlock



⚠ IP 67

A	P	110V	230V	400V
63	3	5925	5911	—
63	4	—	5109	5110
63	5	—	5112	5113
125	3	7060	7000	—
125	4	—	5887	5691
125	5	—	5888	5692

## Wall mounted receptacles with mechanical DUO-interlock



⚠ IP 67

A	P	110V	230V	400V
16	3	7620	7621	—
16	4	—	7623	7624
16	5	—	—	7626
32	3	7628	7629	—
32	4	—	7633	7634
32	5	—	—	7636

## Panel mounted receptacles with mechanical DUO-interlock



⚠ IP 67

A	P	110V	230V	400V
16	3	7520	7521	—
16	4	—	7523	7524
16	5	—	—	7526
32	3	7530	7531	—
32	4	—	7533	7534
32	5	—	—	7536

## Wall mounted receptacles with mechanical DUO-interlock



⚠ IP 67

fused,  
DIN-rail

A	P	110V	230V	400V
16	3	—	7050	—
16	4	—	—	5630
16	5	—	—	5633
32	4	—	—	5635
32	5	—	—	5638
63	4	—	—	5640
63	5	—	—	5643

## Wall mounted receptacles with mechanical DUO-interlock



⚠ IP 67

fused,  
MCB

A	P	110V	230V	400V
16	3	—	7238	—
16	4	—	—	7239
16	5	—	—	7240
32	4	—	—	7241
32	5	—	—	7242
63	4	—	—	7243
63	5	—	—	7244

## Mechanical DUO-interlock



After insertion and switching on, the plug is interlocked in the ON-position.  
After switching off and withdrawing, the switch is locked in the OFF-position.





# Phase inverter plugs/inlets 16A and 32A

## Plugs and receptacles for low voltage

Other voltages and frequencies available on request.

Plugs for the world

### Phase inverter plugs AM-TOP



single part  
body, screw  
terminals

A	P	110V	230V	400V
16	3	—	—	—
16	4	—	338	339
16	5	—	318	319
32	3	—	—	—
32	4	—	396	397
32	5	—	321	322

▲ IP 44

### Phase inverter plugs ProTOP



split body,  
screw  
terminals

A	P	110V	230V	400V
16	3	—	—	—
16	4	—	—	—
16	5	—	—	3319
32	3	—	—	—
32	4	—	—	—
32	5	—	—	3322

▲ IP 44

### Wall mounted phase inverter inlets



▲ IP 44

A	P	110V	230V	400V
16	3	—	—	—
16	4	—	—	—
16	5	—	—	3517
32	3	—	—	—
32	4	—	—	—
32	5	—	—	3523

### Panel mounted phase inverter inlets



▲ IP 44

A	P	110V	230V	400V
16	3	—	—	—
16	4	—	3348	3350
16	5	—	—	20970
32	3	—	—	—
32	4	—	3355	3356
32	5	—	3717	21241

### Panel mounted phase inverter inlet



▲ IP 44

A	P	110V	230V	400V
16	3	—	—	—
16	4	—	—	—
16	5	—	—	854
32	3	—	—	—
32	4	—	—	—
32	5	—	—	—

### Wall mounted receptacles for low voltage



▲ IP 44

A	P	20-25V 50 a. 60 Hz	40-50V 50 a. 60 Hz	20-25V/ 40-50V 100-200 Hz
16	2	1825	1831	—
16	3	1832	1837	1835
32	2	1838	1844	—
32	3	1845	1850	1848

### Panel mounted receptacles for low voltage



▲ IP 44

A	P	20-25V 50 a. 60 Hz	40-50V 50 a. 60 Hz	20-25V/ 40-50V 100-200 Hz
16	2	603	604	—
16	3	610	611	612
32	2	616	617	—
32	3	623	624	625

### Plugs for low voltage



▲ IP 44

A	P	20-25V 50 a. 60 Hz	40-50V 50 a. 60 Hz	20-25V/ 40-50V 100-200 Hz
16	2	629	630	—
16	3	636	637	638
32	2	642	643	—
32	3	649	650	651

### Connectors for low voltage



▲ IP 44

A	P	20-25V 50 a. 60 Hz	40-50V 50 a. 60 Hz	20-25V/ 40-50V 100-200 Hz
16	2	681	682	—
16	3	688	689	690
32	2	694	695	—
32	3	701	702	703

### Phase inverter plugs AM-TOP



single part  
body, screw  
terminals

▲ IP 67

A	P	110V	230V	400V
16	3	—	—	—
16	4	—	3338	3339
16	5	—	—	325
32	3	—	—	—
32	4	—	3340	3341
32	5	—	327	328

### Phase inverter plug VarioTOP



▲ IP 44

A	P	110V	230V	400V
16	3	—	—	—
16	4	—	—	—
16	5	—	—	859
32	3	—	—	—
32	4	—	—	—
32	5	—	—	—

### Wall mounted phase inverter inlets



▲ IP 44

A	P	110V	230V	400V
16	3	—	—	—
16	4	—	3342	3343
16	5	—	—	2511
32	3	—	—	—
32	4	—	3345	3346
32	5	—	3347	2478



### Wall mounted receptacles for low voltage



▲ IP 44

A	P	20-25V 50 a. 60 Hz	40-50V 50 a. 60 Hz	20-25V/ 40-50V 100-200 Hz
16	2	577	578	—
16	3	584	585	586
32	2	590	591	—
32	3	597	598	599

### Panel mounted receptacles for low voltage



▲ IP 44


A	P	20-25V 50 a. 60 Hz	40-50V 50 a. 60 Hz	20-25V/ 40-50V 100-200 Hz
16	2	1270	2855	—
16	3	2845	1272	2860
32	2	1271	2864	—
32	3	2870	1273	2852

### Wall mounted appliance inlets for low voltage




▲ IP 44

A	P	20-25V 50 a. 60 Hz	40-50V 50 a. 60 Hz	20-25V/ 40-50V 100-200 Hz
16	2	1955	1961	—
16	3	1962	1967	1965
32	2	1968	1974	—
32	3	1975	1980	1978




# Plugs and receptacles 7 pole


Other voltages and frequencies available on request.

Wall mounted receptacles		A	P	230V	400V	500V
		16	7	733	<b>734</b>	1035
		32	7	735	<b>736</b>	1040


▲ IP 44

Panel mounted receptacles angled 20°		A	P	230V	400V	500V
		16	7	737	<b>738</b>	1045
		32	7	739	<b>740</b>	1050


▲ IP 44

Plugs AM-TOP		A	P	230V	400V	500V
	single part body, screw terminals	16	7	741	<b>742</b>	1055
		32	7	743	<b>744</b>	1060


▲ IP 44

Wall mounted inlets		A	P	230V	400V	500V
		16	7	—	<b>2166</b>	—
		32	7	—	<b>2167</b>	—


▲ IP 44

Connectors AM-TOP		A	P	230V	400V	500V
	single part body, screw terminals	16	7	745	<b>746</b>	1065
		32	7	747	<b>748</b>	1070


▲ IP 44

Wall mounted receptacles with mechanical DUO-interlock		A	P	230V	400V	500V
	3 pole switch, can be padlocked	16	7	—	<b>5536</b>	—
		32	7	—	<b>7061</b>	—


▲ IP 44

Wall mounted receptacles		A	P	230V	400V	500V
		16	7	3240	<b>2746</b>	3262
		32	7	2818	<b>2648</b>	2782


▲▲ IP 67

Panel mounted receptacles angled 20°		A	P	230V	400V	500V
		16	7	2883	<b>2459</b>	2296
		32	7	—	<b>2317</b>	2212


▲▲ IP 67

Plugs AM-TOP		A	P	230V	400V	500V
	single part body, screw terminals	16	7	3776	<b>3777</b>	3913
		32	7	2405	<b>2324</b>	2213


▲▲ IP 67

Panel mounted inlets		A	P	230V	400V	500V
		16	7	749	<b>750</b>	1075
		32	7	751	<b>752</b>	1080

▲ IP 44

Connectors AM-TOP		A	P	230V	400V	500V
	single part body, screw terminals	16	7	3783	<b>3916</b>	3784
		32	7	2406	<b>2255</b>	2460

▲▲ IP 67

Wall mounted receptacles with mechanical DUO-interlock		A	P	230V	400V	500V
	3 pole switch, can be padlocked	16	7	—	<b>5785</b>	—
		32	7	—	<b>6106</b>	—

▲▲ IP 67

## Plugs and receptacles 7 pole for multi functional applications

These plugs and receptacles provide solutions where there are multi functional requirements in industry, farming and commerce.

This number of poles provides solutions in the following fields:

- Star-delta start-up
- Closed loop control
- Open loop control
- Monitoring
- Detection and alarms
- Clearing alarms
- Electrical interlocking



# CEE receptacles Cepex

Other voltages and frequencies available on request.



Plugs for the world

**Wall mounted receptacles**

grey

A	P	110V	230V	400V
16	3	4101	4102	—
16	4	—	4254	4103
16	5	—	—	4105
32	3	4106	4107	—
32	4	—	—	4108
32	5	—	—	4110
SCHUKO				4970

⚠ IP 44

**Wall mounted receptacles**

grey, with labeling field

A	P	110V	230V	400V
16	3	—	4132	—
16	4	—	—	4133
16	5	—	—	4135
32	3	—	4137	—
32	4	—	—	4138
32	5	—	—	4140
SCHUKO				4973

⚠ IP 44

**Wall mounted receptacles**

grey, with labeling field and lockable cover

A	P	110V	230V	400V
16	3	—	4162	—
16	4	—	—	4163
16	5	—	—	4165
32	3	—	4167	—
32	4	—	—	4168
32	5	—	—	4170
SCHUKO				4976

⚠ IP 44

**Panel mounted receptacles**

alpine white

A	P	110V	230V	400V
16	3	—	—	—
16	4	—	—	—
16	5	—	—	4262
32	3	—	—	—
32	4	—	—	—
32	5	—	—	4263
SCHUKO				4979

⚠ IP 44

**Flush mounted receptacles**


pearl white

A	P	110V	230V	400V
16	3	—	4122	—
16	4	—	—	—
16	5	—	—	4125
32	3	—	4127	—
32	4	—	—	—
32	5	—	—	4130
SCHUKO				4972

⚠ IP 44

**Flush mounted installation box**

for Cepex CEE receptacles 16A and 32A and Cepex SCHUKO receptacles



Part no. 41404

**Panel mounted receptacles**

pearl white

A	P	110V	230V	400V
16	3	4111	4112	—
16	4	—	4233	4113
16	5	—	—	4115
32	3	4116	4117	—
32	4	—	—	4118
32	5	—	—	4120
SCHUKO				4971

⚠ IP 44

**Panel mounted receptacles**

pearl white, with labeling field

A	P	110V	230V	400V
16	3	4141	4142	—
16	4	—	—	4143
16	5	—	—	4145
32	3	4146	4147	—
32	4	—	—	4148
32	5	—	—	4150
SCHUKO				4974

⚠ IP 44

**Panel mounted receptacles**

pearl white, with labeling field and lockable cover

A	P	110V	230V	400V
16	3	4171	4172	—
16	4	—	—	4173
16	5	—	—	4175
32	3	—	4177	—
32	4	—	—	4178
32	5	—	—	4180
SCHUKO				4977

⚠ IP 44

**Panel mounted receptacles**

alpine white, with labeling field

A	P	110V	230V	400V
16	3	—	4247	—
16	4	—	—	4273
16	5	—	—	4237
32	3	—	4274	—
32	4	—	—	4275
32	5	—	—	4238
SCHUKO				4980

⚠ IP 44

**Cepex modular system**

Some versions of Cepex panel mounted receptacles are shown on the left. Further versions you can create using Cepex panel receptacles, shown above, in combination with the installation box 41404.



Cepex SCHUKO panel mounted receptacle with labeling field 4145  
+  
flush mounted installation box 41404  
=  
flush mounted receptacle

## Perfect in every detail - one fits another

**Anything goes.**

Covers, current rating and colors may be optionally combined: neutral cover, with labeling field, with labeling field and lock, 3 pole, 5 pole and SCHUKO.



**Resistant to ball rebound.**


All Cepex receptacles with neutral covers meet DIN 18032 standards for ball rebound and are suitable for use in sports facilities and comparable environments.




# Plugs and receptacles 200A up to 400A

Plugs and receptacles are available in seawater resistant design on request.


Other voltages and frequencies available on request.

Receptacles								
with cable gland	A	P	230V	400V	500V	690V	1000V	weight
		200	4	75220	75221	75222	75223	75224
	200	5	75225	75226	75227	75228	75229	5780
	250	4	75020	75021	75022	75023	75024	10510
	250	5	75110	75111	75112	75113	75114	11020
	400	4	75025	75026	75027	75028	75029	10510
IP 67	400	5	75115	75116	75117	75118	75119	11020


  

Panel mounted receptacles								
with cable gland	A	P	230V	400V	500V	690V	1000V	weight
		200	4	75240	75241	75242	75243	75244
	200	5	75245	75246	75247	75248	75249	3450
	250	4	75040	75041	75042	75043	75044	6800
	250	5	75130	75131	75132	75133	75134	7300
	400	4	75045	75046	75047	75048	75049	6800
IP 67	400	5	75135	75136	75137	75138	75139	7300


  

Receptacles, switched and interlocked								
with cable gland	A	P	230V	400V	500V	690V	1000V	weight
		200	4	75230	75231	75232	75233	75234
	200	5	75235	75236	75237	75238	75239	25300
	250	4	75030	75031	75032	75033	75034	45000
	250	5	75120	75121	75122	75123	75124	46500
	400	4	75035	75036	75037	75038	75039	43900
IP 55	400	5	75125	75126	75127	75128	75129	45400

Plugs								
with cable gland	A	P	230V	400V	500V	690V	1000V	weight
		200	4	75200	75201	75202	75203	75204
	200	5	75205	75206	75207	75208	75209	3200
	250	4	75000	75001	75002	75003	75004	8290
	250	5	75090	75091	75092	75093	75094	8610
	400	4	75005	75006	75007	75008	75009	8290
IP 67	400	5	75095	75096	75097	75098	75099	8610

Connectors								
with cable gland	A	P	230V	400V	500V	690V	1000V	weight
		200	4	75210	75211	75212	75213	75214
	200	5	75215	75216	75217	75218	75219	3980
	250	4	75010	75011	75012	75013	75014	9160
	250	5	75100	75101	75102	75103	75104	9670
	400	4	75015	75016	75017	75018	75019	9160
IP 67	400	5	75105	75106	75107	75108	75109	9670

## Heavy duty versions for industry



Mechanical interlocking. For mobile consumers of rated current > 125A we have included a heavy duty range with 200A, 250A and 400A in our program. This can be supplied for rated voltages of 230V to 1000V and in seawater resistant version.

The heavy duty range is suitable for use in very harsh conditions, e.g. building sites:

- drilling rigs
- tunnel constructions
- gravel pits
- strip mining
- container terminals and crane connections in harbours
- for versatile power supply at large-scale indoor and outdoor events
- power supply to market places
- airports
- quarries

# SCHUKO and grounding-type receptacles

SCHUKO and French/Belgian standard 16A, 230V, 2p + E. British standard 13A, 230V, 2p + E.

Other variations on request.

Plugs for the world

## SCHUKO panel mounted receptacles



with plug-in terminals or screw-terminals, without shutter

Color	plug-in terminals	screw terminals
grey	11010	11030
blue	11011	11031
black	11012	11032
red	11013	11033

⚠ IP 54

## Grounding-type panel mounted receptacles French/Belgian standard



with plug-in terminals, without shutter

Color	plug-in terminals	screw terminals
grey	11110	—
blue	11111	—
black	—	—
red	—	—

⚠ IP 44

## SCHUKO wall mounted receptacles



with plug-in terminals, without shutter

Color	plug-in terminals	screw terminals
grey	10081	—
blue	10082	—
black	10083	—
red	—	—

⚠ IP 44

## Base for wall mounted receptacles



with cable entry and screws

Part no.	grey	10714
Part no.	blue	10715
Part no.	black	10716

## SCHUKO panel mounted receptacles



with plug-in terminals or screw-terminals, without shutter

Color	plug-in terminals	screw terminals
grey	—	—
blue	11511	11531
black	11512	11532
red	—	—

IP 20

## Grounding-type panel mounted receptacle British standard



with screw-terminals, with shutter and matching frame and seal

Color	plug-in terminals	screw terminals
grey	—	—
blue	—	—
black	—	10713
red	—	—

⚠ IP 44

## SCHUKO plugs with grommet



combined PE-conductor acc. to German and French/Belgian standards.

Color	
grey	10749
black	10754
orange	10837
blue	10838
red	10839
yellow	10840
green	10841

## SCHUKO panel mounted receptacles



with plug-in terminals or screw-terminals, with shutter

Color	plug-in terminals	screw terminals
grey	11060	—
blue	11061	11081
black	—	—
red	—	—

⚠ IP 54

## Grounding-type panel mounted receptacles French/Belgian standard



with plug-in terminals or screw-terminals, with shutter

Color	plug-in terminals	screw terminals
grey	11160	11180
blue	11161	11181
black	11162	11182
red	11163	11183

⚠ IP 44

## Grounding-type wall mounted receptacle French/Belgian standard



with plug-in terminals, with shutter

Color	plug-in terminals	screw terminals
grey	—	—
blue	10092	—
black	—	—
red	—	—

⚠ IP 44

## Modular system for wall mounted receptacle

The combination of the base with one of the panel mounted receptacles shown above, gives a wall mounted receptacle.



## Grounding-type panel mounted receptacles French/Belgian standard



with plug-in terminals or screw-terminals, without shutter

Color	plug-in terminals	screw terminals
grey	—	—
blue	11611	11631
black	—	—
red	—	—

IP 20

## Grounding-type panel mounted receptacle British standard



with screw-terminals, with shutter and seal

Color	plug-in terminals	screw terminals
grey	—	—
blue	—	10718
black	—	—
red	—	—

⚠ IP 44

## SCHUKO connectors with grommet



Color	
grey	10751
black	10755
orange	10842
blue	10843
red	10844
yellow	10845
green	10846


# AMAXX® receptacle combinations

## Success in series

Extensively configurable receptacle combinations in six different sizes – the AMAXX® range by MENNEKES. With an appealing and unique design in many variations for almost all applications. With our extended program, you now have three good extra reasons to opt for AMAXX® receptacle combinations.

# AMAXX®

by MENNEKES

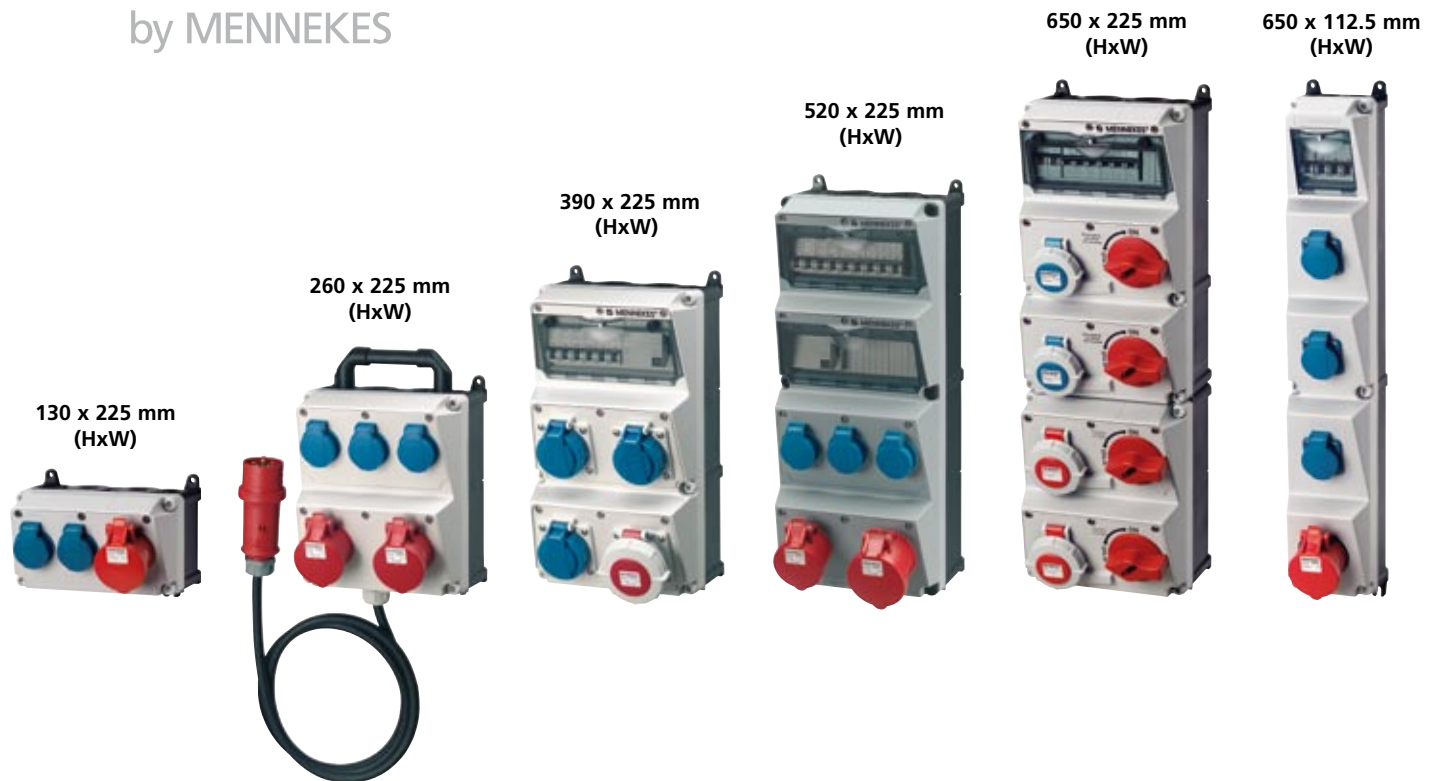

- Protection types: IP 44 and IP 67.
- Enclosure materials: AMAPLAST and especially chemical-resistant AMELAN.
- Colors: bottom part black, top part grey, silver (IP 44), yellow or red.
- Equipped with: CEE receptacles from 16A, 3-poles up to 63A, 5-poles, grounding-type receptacles in accordance with many national standards, DUO receptacles switched and interlocked from 16A, 3p to 32A, 5p as well as fuse elements.


## International



AMAXX® receptacle combinations are also perfectly suited for the international market with many different standards. For example: British, French/Belgian, Danish and Swiss standard as well as the NEMA standard (USA and Canada). Contact us.



## Features and benefits

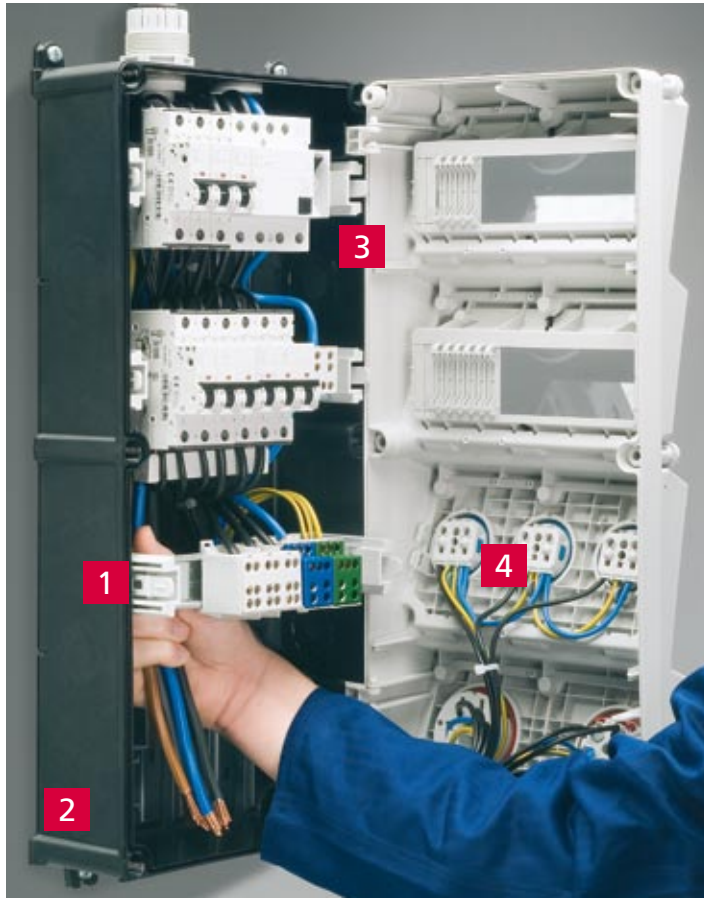

**1 Lifiable DIN Rails**

Lifiable DIN rails and a large, smooth wiring space significantly ease the insertion as well as connection of large cables.

**2 One-man installation**

Shorter installation times with the new, user-friendly external fixing.

**3 Hinged cover**

The hinged cover which opens to one side, eases connection work.

**4 Ready for application**

All combinations are pre-wired for installation and tested for electric safety and quality.



Generally angled insertion direction.



Especially fast opening and closing of the enclosure due to captive double-threaded cover screws.



Both hands free because inspection windows fold downwards. Window can be locked with a padlock, enclosure can be sealed.



Standard pre-punched cable entries at the top and at the bottom for M 20 up to M 40.

## Receptacle combinations for versatile use

### EverGUM receptacle combinations with solid rubber enclosures

Wall mounted, enclosure  
380 x 230 mm or  
380 x 320 mm



Receptacle strip, enclosure  
445 x 135 mm



Portable, enclosure  
300 x 230 x 287.5 mm or  
360 x 340 x 330 mm



Portable, with feeder  
cable, enclosure  
300 x 230 x 287.5 mm or  
360 x 340 x 330 mm



With the EverGUM range MENNEKES provides a solid rubber alternative to enclosures in AMAPLAST, AMELAN and sheet steel. This is an alternative which is suitable for the most diverse environments, especially when there is likely to be exposure to rough handling or aggressive cleaning agents. These products can also be supplied to conform to the standards of other European countries.

## AirKRAFT and 3KRAFT

**AirKRAFT**  
for energy, data,  
compressed air.  
Also available with feeder cable.  
Enclosure  
400 x 229 x 220 mm  
(size without receptacles)



**3KRAFT**  
for energy, data,  
compressed air.  
Also available with feeder cable.  
Enclosure  
diam. 240-264 x H 152 mm  
(depending what receptacles  
are used)



## DELTA-BOX

**DELTA-BOXES**

Enclosure  
114 x 160 x 97 mm  
(size without  
receptacles)



**DELTA-BOXES  
with feeder cable.**

Enclosure  
114 x 160 x 97 mm  
(size without  
receptacles)



### For ceilings, walls and floors.

Three colors: Signal yellow, red or silver.

**AirKRAFT.** Up to four receptacles, or data, or light, plus compressed air, plus fusing. Ready for connection or with supply cable and plug.

**3KRAFT.** Equipped to suit your requirements: Up to three receptacles, or data, plus compressed air. Ready for connection or with supply cable and plug.

### DELTA-BOX - the classic unit.

With cable grip. Enclosure and insert from impact and resistant AMAPLAST.

Available in ▲ IP 44, ▲▲ IP 67 and ▲▲▲ IP 68.

## Stainless steel surface and flush mounted receptacle combinations



**Safe.**  
**Practical.**  
**Timelessly elegant.**

- Protection type IP 43 or IP 44 with closed door, even when plugs are inserted.
- The cable guard aperture is sufficiently dimensioned for leading through cables.
- Safety lock protects against unauthorized access.

## Power posts

Rugged. Vandalism-proof.  
Steel power posts provide a safe means of energy supply, protection against car-crossing. Hot-dip galvanized and powder coated. Available in various sizes.



## CombiTOWER

Power. Compressed air. Water.  
Outdoors and indoors.  
The solution: CombiTOWER. Short routes to your energy source for industry, workshops, assembly shops, loading platforms, etc.





# Index of part numbers

Part no.	page	Part no.	page	Part no.	page	Part no.	page	Part no.	page	Part no.	page	Part no.	page	Part no.	page	Part no.	page
1	4	277	6	555	7	907	5	1341	5	1711	5	2782	10	3981	6	5887	8
2	4	278	6	556	7	919	6	1342	5	1712	5	2818	10	3987	6	5888	8
3	6	279	6	560	7	924	6	1343	5	1716	5	2845	9	4101	11	5911	8
4	6	280	6	561	7	931	6	1345	5	1717	5	2852	9	4102	11	5924	8
5	7	281	6	562	7	932	6	1346	5	1719	5	2855	9	4103	11	5925	8
6	7	282	6	577	9	933	6	1347	5	1720	5	2860	9	4105	11	5955	8
13	6	286	6	578	9	935	6	1348	5	1721	5	2864	9	4106	11	5956	8
14	6	287	6	584	9	938	6	1365	4	1723	5	2870	9	4107	11	5959	8
15	7	288	6	585	9	939	6	1366	4	1724	5	2883	10	4108	11	6059	8
16	7	289	6	586	9	942	6	1367	4	1730	5	3030	4	4110	11	6062	8
31	5	290	6	590	9	945	6	1368	4	1733	5	3031	4	4111	11	6106	10
32	5	291	6	591	9	947	6	1369	4	1734	5	3034	4	4112	11	6569	8
33	6	292	6	597	9	948	6	1371	4	1735	5	3036	4	4113	11	6571	8
34	6	293	6	598	9	949	6	1372	4	1738	5	3041	4	4115	11	7000	8
35	7	294	6	599	9	951	6	1373	4	1739	5	3045	4	4116	11	7002	8
36	7	298	6	603	9	952	6	1384	4	1740	5	3072	4	4117	11	7010	8
100	4	299	6	604	9	972	6	1385	4	1744	5	3074	4	4118	11	7011	8
101	4	300	6	610	9	979	7	1386	4	1745	5	3093	4	4120	11	7012	8
102	4	315	6	611	9	980	7	1388	4	1746	5	3110	4	4122	11	7050	8
103	4	318	9	612	9	987	5	1389	4	1750	5	3112	4	4125	11	7060	8
104	4	319	9	616	9	988	5	1390	4	1751	5	3136	4	4127	11	7061	10
105	4	321	9	617	9	989	5	1394	4	1755	5	3153	4	4130	11	7213	8
109	4	322	9	623	9	993	7	1395	4	1756	5	3197	4	4132	11	7216	8
110	4	325	9	624	9	994	7	1396	4	1786	5	3200	4	4133	11	7217	8
111	4	327	9	625	9	997	5	1397	4	1787	5	3240	10	4135	11	7218	8
121	7	328	9	629	9	998	5	1398	4	1788	5	3254	4	4137	11	7219	8
122	7	331	6	630	9	1035	10	1399	4	1789	5	3262	10	4138	11	7220	8
125	7	332	6	636	9	1040	10	1410	6	1790	5	3266	6	4140	11	7221	8
126	7	333	6	637	9	1045	10	1411	6	1791	5	3306	6	4141	11	7222	8
128	4	334	6	638	9	1050	10	1418	4	1795	5	3312	6	4142	11	7238	8
129	4	335	6	642	9	1055	10	1419	4	1796	5	3319	9	4143	11	7239	8
130	4	336	6	643	9	1060	10	1420	4	1797	5	3322	9	4145	11	7240	8
131	4	338	9	649	9	1065	10	1421	4	1801	5	3331	5	4146	11	7241	8
132	4	339	9	650	9	1070	10	1422	4	1802	5	3338	9	4147	11	7242	8
134	4	340	6	651	9	1075	10	1423	4	1803	5	3339	9	4148	11	7243	8
135	4	341	6	681	9	1080	10	1424	4	1804	5	3340	9	4150	11	7244	8
136	4	342	6	682	9	1081	4	1425	4	1805	5	3341	9	4162	11	7502	8
137	4	343	6	688	9	1103	4	1438	7	1808	5	3342	9	4163	11	7503	8
138	4	344	6	689	9	1107	6	1455	4	1809	5	3343	9	4165	11	7504	8
139	4	345	6	690	9	1122	4	1456	4	1810	5	3345	9	4167	11	7505	8
141	4	346	6	694	9	1123	4	1457	4	1811	5	3346	9	4168	11	7507	8
142	4	347	6	695	9	1124	4	1459	4	1812	5	3347	9	4170	11	7511	8
143	4	348	6	701	9	1126	4	1460	4	1813	5	3348	9	4171	11	7512	8
147	6	352	6	702	9	1127	4	1461	4	1814	5	3350	9	4172	11	7513	8
148	6	353	6	703	9	1128	4	1462	4	1818	5	3355	9	4173	11	7514	8
149	6	354	6	711	6	1131	5	1463	4	1819	5	3356	9	4175	11	7516	8
151	6	355	6	712	6	1132	5	1464	4	1820	5	3380	4	4177	11	7520	8
152	6	356	6	717	6	1133	5	1465	4	1825	9	3385	5	4178	11	7521	8
159	6	357	6	719	6	1135	5	1466	4	1831	9	3413	6	4180	11	7523	8
160	6	359	6	725	7	1136	4	1467	4	1832	9	3424	6	4233	11	7524	8
163	6	360	6	731	7	1137	4	1471	4	1835	9	3449	4	4237	11	7526	8
164	6	361	6	733	10	1138	4	1472	4	1837	9	3451	4	4238	11	7530	8
179	7	362	6	734	10	1139	4	1473	4	1838	9	3454	4	4247	11	7531	8
180	7	363	6	735	10	1140	4	1474	4	1844	9	3473	5	4254	11	7533	8
181	7	364	6	736	10	1141	4	1475	4	1845	9	3485	5	4262	11	7534	8
193	7	366	6	737	10	1143	4	1476	4	1848	9	3517	9	4263	11	7536	8
194	7	367	6	738	10	1144	4	1477	4	1850	9	3523	9	4273	11	7602	8
200	5	368	6	739	10	1145	4	1478	4	1851	5	3524	4	4274	11	7603	8
203	4	392	6	740	10	1146	4	1479	4	1852	5	3575	4	4275	11	7604	8
204	4	393	6	741	10	1147	4	1483	4	1855	5	3583	6	4970	11	7605	8
205	4	394	6	742	10	1148	4	1484	4	1856	5	3646	6	4971	11	7607	8
207	4	396	9	743	10	1149	4	1485	4	1860	5	3656	6	4972	11	7611	8
208	4	397	9	744	10	1150	4	1489	4	1861	5	3658	6	4973	11	7612	8
209	4	398	6	745	10	1151	4	1490	4	1866	5	3665	6	4974	11	7613	8
210	4	399	6	746	10	1153	4	1491	4	1867	5	3704	6	4976	11	7614	8
211	4	400	6	747	10	1154	4	1492	4	1870	5	3717	9	4977	11	7616	8
212	4	401	6	748	10	1155	4	1493	4	1871	5	3776	10	4979	11	7620	8
214	4	402	6	749	10	1166	5	1494	4	1875	5	3777	10	4980	11	7621	8
215	4	403	6	750	10	1177	4	1495	4	1876	5	3783	10	5099	8	7623	8
216	4	404	6	751	10	1178	4	1496	4	1877	5	3784	10	5100	8	7624	8
217	4	405	6	752	10	1192	4	1498	4	1878	5	3794	6	5102	8	7626	8
218	4	406	6	761	7	1193	4	1499	4	1879	5	3796	6	5103	8	7628	8
219	4	410	6	763	7	1194	4	1500	4	1880	5	3799	6	5104	8	7629	8
220	4	411	6	800	6	1195	4	1501	4	1884	5	3807	6	5105	8	7633	8
221	4	412	6	801	6	1196	4	1502	4	1885	5	3809	6	5107	8	7634	8
222	4	418	5	802	6	1198	4	1503	4	1955	9	3811	6	5108	8	7636	8
226	4	419	5	803	6	1199	4	1504	4	1961	9	3819	6	5109	8	10081	13
227	4	420	5	804	6	1200	4	1505	4	1962	9	3821	6	5110	8	10082	13
228	4	421	5	810	6	1201	4	1506	4	1965	9	3823	6	5112	8	10083	13
229	4	422	5	812	6	1202	4	1551	4	1967	9	3829	6	5113	8	10092	13
230	4	509	7	813	6	1203	4	1555	4	1968	9	3830	6	5457	8	10713	13
231	4	510	7	815	6	1204	4	1556	4	1974	9	3832	6	5459	8	10714	13
232	4	511	7	816	6	1205	4	1557	4	1975	9	3839	6	5460	8	10715	13
233	4	512	7	817	6	1206	4	1631	5	1978	9	3841	6	5462	8	10716	13
234	4	513	7	819	6	1208	4	1632	5	1980	9	3844	6	5536	10	10718	13
238	4	514	7	821	6	1209	4	1633	5	1981	6	3851	6	5599	8	10749	13
239	4	518	7	822	6	1210	4	1636	5	1982	6	3853	6	5600	8	10751	13
240	4	519	7	825	6	1211	4	1637	5	1983	6	3855	6	5602	8	10754	13
241	5	521	7														

# References



BMW motorcycle plant, Berlin – Germany



AIDAbella, Jos. L. Meyer Werft, Papenburg – Germany



Formula 1 circuit, Manama – Bahrain



Constitution, Heerema Marine Contractors – Netherland



Port of Salalah – Oman



Container Terminal, Le Havre – France

Refer to our brochures and catalogs to keep up to date.  
Download the latest versions from our website in practical  
PDF format or request print copies by phone or E-Mail.

**MENNEKES Electrical Products**

277, Fairfield Road  
USA-Fairfield, N.J. 07004  
Tel. (973) 882-8333  
Fax (973) 882-5585  
E-Mail [info@MENNEKES.com](mailto:info@MENNEKES.com)  
Internet [www.MENNEKES.com](http://www.MENNEKES.com)



**AMAXX®.**  
The right combination for every  
application.



**LockOUT-LET MSR Series.**  
Non-Metallic Interlocked  
Receptacles.



**North American Catalog.**  
U.S. and Canadian Standard  
Products.



**Plugs for the World.**  
Full Line Catalog.

**Headquarter:**

**MENNEKES**  
**Elektrotechnik GmbH & Co. KG**  
**Industrial plugs and receptacles**  
Aloys-Mennekes-Str. 1  
D-57399 Kirchhundem  
Tel. + 49 (0) 27 23 / 41-1  
Fax + 49 (0) 27 23 / 41-2 14  
E-Mail [info@MENNEKES.de](mailto:info@MENNEKES.de)  
Internet [www.MENNEKES.de](http://www.MENNEKES.de)

**Plant Neudorf:**

Technoplast GmbH  
MENNEKES Straße 1  
D-09465 Neudorf / Erzgebirge  
Tel. + 49 (0) 3 73 42 / 8 62-0  
Fax + 49 (0) 3 73 42 / 8 62-38  
E-Mail [info@tp-neudorf.de](mailto:info@tp-neudorf.de)

For further information please visit our homepage:

**[www.MENNEKES.com](http://www.MENNEKES.com)**

Request brochures by phone at:

**(973) 882-8333**

Request brochures by E-Mail to:

**[info@MENNEKES.com](mailto:info@MENNEKES.com)**

Service by  
**MENNEKES®.**  
Always well  
informed.