

TL-D LIFEMAX Super 80

TL-D 36W/865 1SL/25


The TL-D LIFEMAX Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

Product data

General Information		Voltage (Nom)	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]		103 V
Life To 10% Failures (Nom)	10000 h	Controls and Dimming	
Life To 50% Failures (Nom)	15000 h	Dimmable	Yes
Life To 50% Failures Preheat (Nom)	20000 h	Approval and Application	
Light Technical		Energy Efficiency Label (EEL)	A
Color Code	865 [CCT of 6500K]	Mercury (Hg) Content (Nom)	2.0 mg
Luminous Flux (Rated) (Nom)	3070 lm	Product Data	
Color Designation	Cool Daylight	Full product code	871150028563840
Lumen Maintenance 2000 h (Nom)	96 %	Order product name	TL-D 36W/865 1SL/25
Lumen Maintenance 5000 h (Nom)	94 %	EAN/UPC - Product	8711500285638
Chromaticity Coordinate X (Nom)	313	Order code	927982286536
Chromaticity Coordinate Y (Nom)	338	Numerator - Quantity Per Pack	1
Correlated Color Temperature (Nom)	6500 K	Numerator - Packs per outer box	25
Luminous Efficacy (rated) (Nom)	85 lm/W	Material Nr. (12NC)	927982286536
Color Rendering Index (Nom)	80	Net Weight (Piece)	0.140 kg
Operating and Electrical			
Power (Rated) (Nom)	36 W		
Lamp Current (Nom)	0.440 A		

TL-D LIFEMAX Super 80


Dimensional drawing

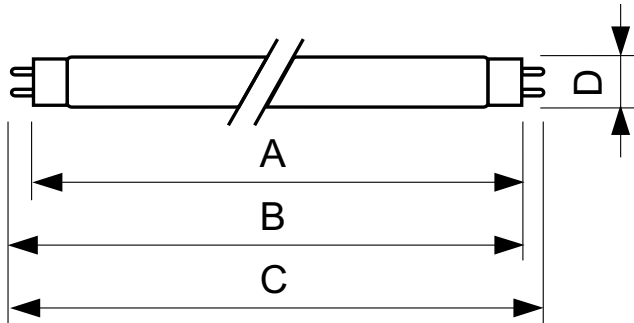


Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 36W/865 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

TL-D 36W/865 CDL G13

Photometric data

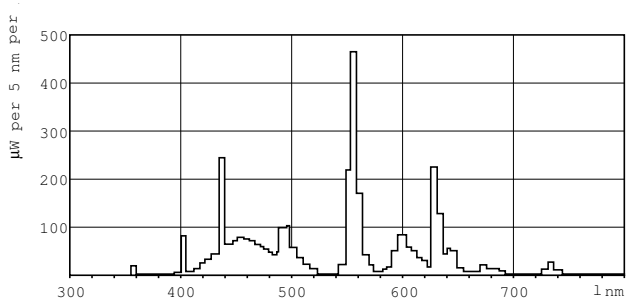

Lightcolor /865

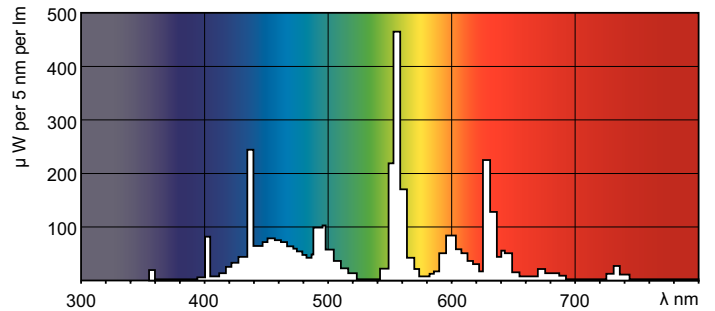

Lightcolor /865

