

Basic unit SIMOCODE pro S, PROFIBUS DP interface 1.5 Mbit/s, 4I/2O freely parameterizable, Us: 110...240 V AC/DC, input for thermistor connection Monostable relay outputs, expandable by a multifunctional module



Figure similar

Product brand name	SIRIUS
Product designation	Motor management system
Design of the product	Basic device 0
Product type designation	SIMOCODE pro S

General technical data	
Product function	
• soft starter control	Yes
• data acquisition function	Yes
• Diagnostics function	Yes
• Password protection	Yes
• Test function	Yes
• maintenance function	Yes
Product component	
• input for thermistor connection	Yes
• Digital input	Yes
• input for analog temperature sensors	No
• input for ground fault detection	No

• Relay output	Yes
Product extension	
• Temperature monitoring module	Yes
• Current measuring module	Yes
• Current/voltage measuring module	No
• failsafe digital I/O module	No
• Ground fault monitoring module	Yes
• decoupling module	No
• digital I/O module	Yes
• Control unit with display	No
• Control unit	Yes
• analog I/O module	No
Apparent power consumption	5 V·A
Consumed active power	4 W
Insulation voltage	
• with degree of pollution 3 rated value	300 V
Surge voltage resistance rated value	4 000 V
Protection class IP	IP20
Shock resistance	
• when mounted on current measuring module acc. to IEC 60068-2-27	10 g / 11 ms
• acc. to IEC 60068-2-27	15g / 11 ms
Vibration resistance	1-6 Hz / 15 mm; 6-500 Hz / 2 g
• when mounted on current measuring module acc. to IEC 60068-2-6	1 ... 4 Hz / 15 mm, 4 ... 500 Hz / 1g
Switching behavior	monostable
Switching capacity current of the NO contacts of the relay outputs at AC-15	
• at 24 V	6 A
• at 120 V	6 A
• at 230 V	3 A
Switching capacity current of the NO contacts of the relay outputs at DC-13	
• at 24 V	2 A
• at 60 V	0.55 A
Mechanical service life (switching cycles)	
• typical	10 000 000
Electrical endurance (switching cycles)	
• typical	100 000
Buffering time in the event of power failure	0.02 s
Continuous current of the NO contacts of the relay outputs	
• at 50 °C	6 A

• at 60 °C	5 A
Type of input characteristic	Type 1 in accordance with EN 61131-2
Electromagnetic compatibility	
EMC emitted interference	
• acc. to IEC 60947-1	class A
EMI immunity acc. to IEC 60947-1	corresponds to degree of severity 3
Conducted interference	
• due to burst acc. to IEC 61000-4-4	2 kV (power ports) / 1 kV (signal ports)
• due to conductor-earth surge acc. to IEC 61000-4-5	2 kV
• due to conductor-conductor surge acc. to IEC 61000-4-5	1 kV
• due to high-frequency radiation acc. to IEC 61000-4-6	10 V
Field-bound parasitic coupling acc. to IEC 61000-4-3	10 V/m
Electrostatic discharge acc. to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge
Conducted HF-interference emissions acc. to CISPR11	corresponds to degree of severity A
Field-bound HF-interference emission acc. to CISPR11	corresponds to degree of severity A

Inputs/ Outputs	
Product function	
• Parameterizable inputs	Yes
• Parameterizable outputs	Yes
Number of inputs	4
• for thermistor connection	1
Number of digital inputs	
• with a common reference potential	4
Digital input version	
• Type 1 acc. to IEC 61131	Yes
Input voltage at digital input at DC rated value	24 V
Number of outputs	2
Number of outputs as contact-affected switching element	2
Number of semiconductor outputs	0
Wire length for digital signals maximum	300 m
Wire length for thermistor connection	
• with conductor cross-section = 0.5 mm ² maximum	50 m
• with conductor cross-section = 1.5 mm ² maximum	150 m
• with conductor cross-section = 2.5 mm ² maximum	250 m

Protective and monitoring functions

Product function

• Phase unbalance	Yes
• blocking current evaluation	Yes
• power factor monitoring	No
• Ground fault detection	Yes
• Phase failure detection	Yes
• phase sequence recognition	No
• voltage detection	No
• Monitoring of number of start operations	Yes
• Overvoltage detection	No
• Overcurrent detection 1 phase	Yes
• undervoltage detection	No
• undercurrent detection 1 phase	Yes
• active power monitoring	No

Motor protection functions

Product function

• Current detection	Yes
• Overload protection	Yes
• Evaluation of thermistor motor protection	Yes

Response value of thermoresistor

3 400 ... 3 800 Ω

Release value of thermoresistor

1 500 ... 1 650 Ω

Explosion device group and category acc. to ATEX product directive 94/9/EC

Ex II (2) GD / Ex I (M2)

Motor control functions

Product function

• parameterizable overload relay	Yes
• circuit breaker control	Yes
• direct start	Yes
• reverse starting	Yes
• star-delta circuit	Yes
• star-delta reversing circuit	No
• Dahlander circuit	No
• Dahlander reversing circuit	No
• pole-changing switch circuit	No
• pole-changing switch reversing circuit	No
• Slide control	No
• valve control	No

Communication/ Protocol

• Protocol is supported PROFIBUS DP protocol	Yes
--	-----

<ul style="list-style-type: none"> • Protocol is supported PROFINET IO protocol 	No
<ul style="list-style-type: none"> • Protocol is supported PROFI-safe protocol 	No
<ul style="list-style-type: none"> • Protocol is supported Modbus RTU 	No
<ul style="list-style-type: none"> • Protocol is supported EtherNet/IP 	No
<ul style="list-style-type: none"> • Protocol is supported OPC UA Server 	No
<ul style="list-style-type: none"> • Protocol is supported LLDP 	No
<ul style="list-style-type: none"> • Protocol is supported Address Resolution Protocol (ARP) 	No
<ul style="list-style-type: none"> • Protocol is supported SNMP 	No
<ul style="list-style-type: none"> • Protocol is supported HTTPS 	No
<ul style="list-style-type: none"> • Protocol is supported NTP 	No
<ul style="list-style-type: none"> • Protocol is supported Media Redundancy Protocol (MRP) 	No
<ul style="list-style-type: none"> • Product function is supported Device Level Ring (DLR) 	No
Number of interfaces	
<ul style="list-style-type: none"> • acc. to PROFINET 	0
<ul style="list-style-type: none"> • acc. to PROFIBUS 	1
<ul style="list-style-type: none"> • according to Ethernet/IP 	0
Product function Bus communication	Yes
Product function	
<ul style="list-style-type: none"> • web server 	No
<ul style="list-style-type: none"> • shared device 	No
<ul style="list-style-type: none"> • at the Ethernet interface Autocrossover 	No
<ul style="list-style-type: none"> • at the Ethernet interface Autonegotiation 	No
<ul style="list-style-type: none"> • at the Ethernet interface Autosensing 	No
<ul style="list-style-type: none"> • is supported PROFINET system redundancy 	No
<ul style="list-style-type: none"> • supports PROFIenergy measured values 	No
<ul style="list-style-type: none"> • supports PROFIenergy shutdown 	No
Transfer rate maximum	1.5 Mbit/s
Identification & maintenance function	
<ul style="list-style-type: none"> • I&M0 - device-specific information 	Yes
<ul style="list-style-type: none"> • I&M1 – higher-level designation/location designation 	Yes
<ul style="list-style-type: none"> • I&M2 - installation date 	Yes
<ul style="list-style-type: none"> • I&M3 - comment 	Yes
Type of electrical connection	
<ul style="list-style-type: none"> • of the communication interface 	Screw-type terminal (1.5 Mbit)
Installation/ mounting/ dimensions	
Mounting position	any
Mounting type	screw and snap-on mounting
Height	100 mm

Width	22.5 mm
Depth	124.5 mm
Required spacing	
• top	40 mm
• bottom	40 mm
• left	0 mm
• right	0 mm

Connections/Terminals

Product function	
• removable terminal for auxiliary and control circuit	Yes
Type of electrical connection	
• for auxiliary and control current circuit	screw-type terminals
Type of connectable conductor cross-sections	
• solid	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²)
• finely stranded with core end processing	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1 mm ²)
• at AWG conductors solid	1x (20 ... 14), 2x (20 ... 16)
Tightening torque	
• with screw-type terminals	0.6 ... 0.8 N·m
Tightening torque [lbf·in]	
• with screw-type terminals	5.2 ... 7 lbf·in

Ambient conditions

Installation altitude at height above sea level	
• 1 maximum	2 000 m
• 2 maximum	3 000 m
• 3 maximum	4 000 m; No protective separation at 40 °C
Ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +80 °C
• during transport	-40 ... +80 °C
Environmental category	
• during operation acc. to IEC 60721	3K6 (no formation of ice, no condensation, relative humidity 10 ... 95%), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
• during storage acc. to IEC 60721	1K6 (no condensation, relative humidity 10 ... 95%), 1C2 (no salt mist), 1S2 (sand must not get into the devices), 1M4
• during transport acc. to IEC 60721	2K2, 2C1, 2S1, 2M2
Relative humidity	
• during operation	10 ... 95 %
Contact rating of auxiliary contacts according to UL	B300 / R300

Short-circuit protection

Design of short-circuit protection	
---	--

- per output

Fuse links: gG 6 A, quick-response 10 A (IEC 60947-5-1),
miniature circuit-breaker C char.: 1.6 A (IEC 60947-5-1) or 6 A
(I_K < 500 A)

Safety related data

Protection against electrical shock finger-safe

Galvanic isolation

Design of the electrical isolation Protective separation in accordance with IEC 60947-1 for all circuits

- Note

Test report no. 2668 is to be observed

Control circuit/ Control

Type of voltage of the control supply voltage AC/DC

Control supply voltage at AC

- at 50 Hz rated value
- at 60 Hz rated value

110 ... 240 V

110 ... 240 V

Control supply voltage at DC

- rated value

110 ... 240 V

Control supply voltage frequency

- 1 rated value
- 2 rated value

50 Hz

60 Hz

Relative symmetrical tolerance of the control supply voltage frequency

5 %

Operating range factor control supply voltage rated value at DC

- initial value
- Full-scale value

0.85

1.1

Operating range factor control supply voltage rated value at AC at 50 Hz

- initial value
- Full-scale value

0.85

1.1

Operating range factor control supply voltage rated value at AC at 60 Hz

- initial value
- Full-scale value

0.85

1.1

Certificates/approvals

General Product Approval	EMC	For use in hazardous locations
--------------------------	-----	--------------------------------



Declaration of Conformity	Test Certificates	Marine / Shipping
---------------------------	-------------------	-------------------



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



Marine / Shipping	other
-------------------	-------



[Confirmation](#)



[PROFIsafe-Certification](#)

[PROFINET-Certification](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UF7020-1AU01-0>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF7020-1AU01-0>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)




<https://support.industry.siemens.com/cs/ww/en/ps/3UF7020-1AU01-0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF7020-1AU01-0&lang=en

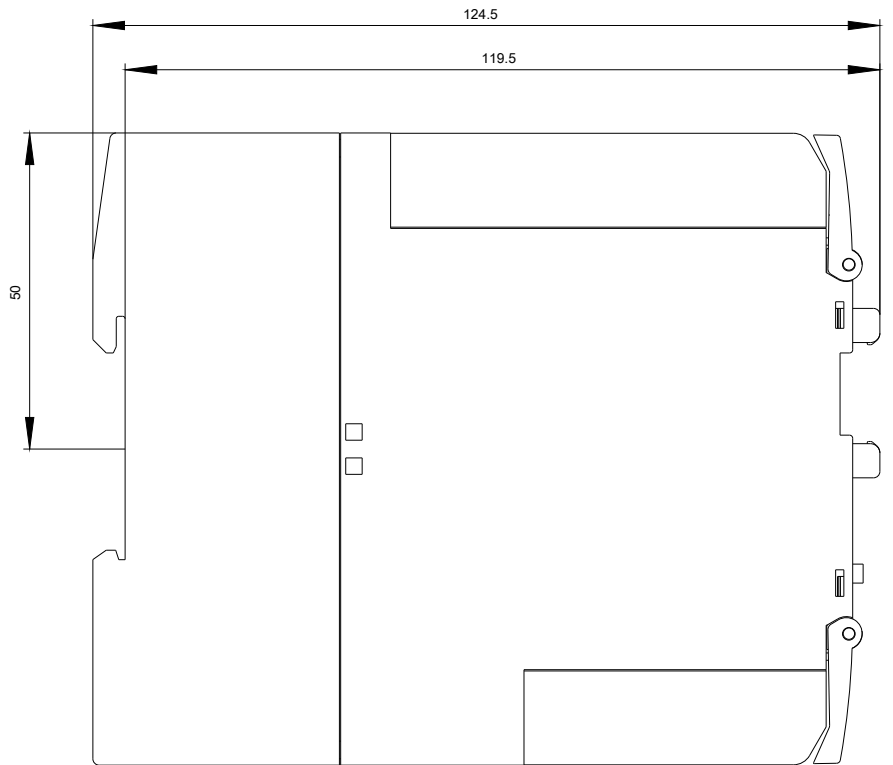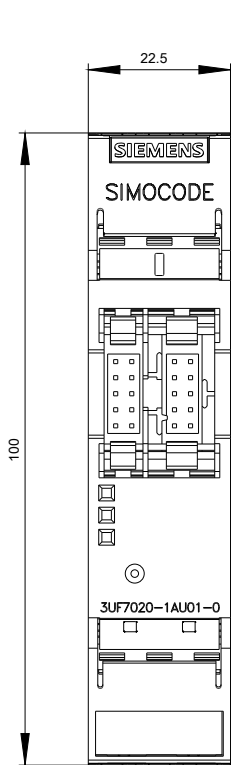

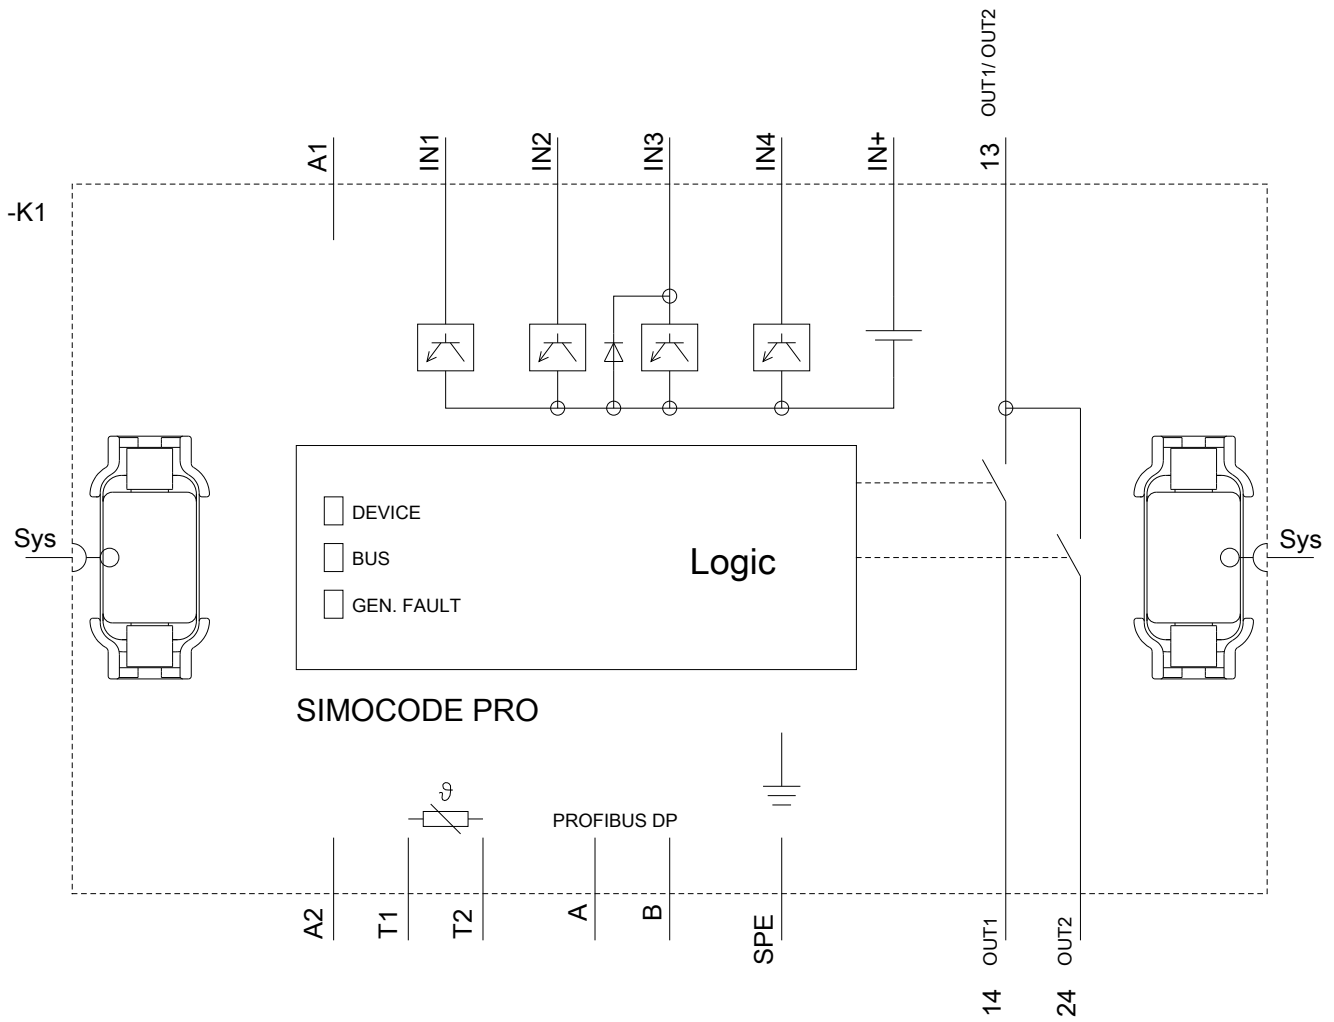

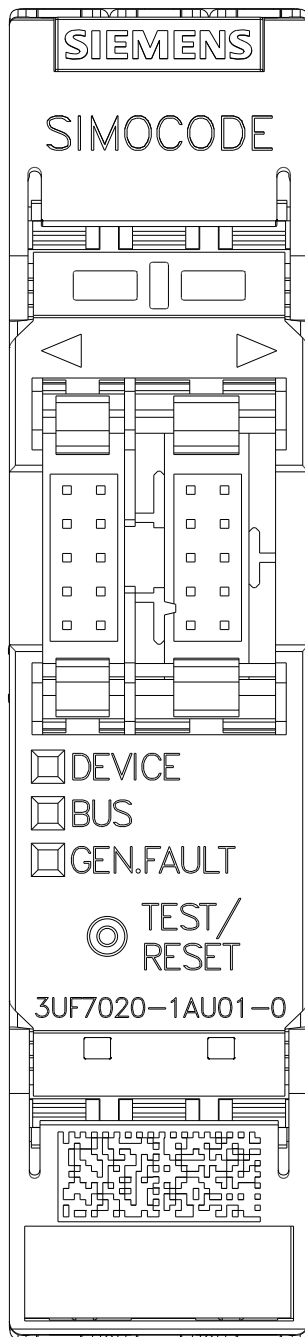

last modified:

04/30/2018